

Effect of Additives to Supercritical Methyl Acetate on Biodiesel Production*

Fadjar Goembira^{a,b} and Shiro Saka^{a,**}

^aDepartment of Socio-Environmental Energy Science
Graduate School of Energy Science
Kyoto University
Yoshida-honmachi, Sakyo-ku, Kyoto 606-8501, Japan

^bDepartment of Environmental Engineering
Faculty of Engineering
Andalas University
Kampus Unand Limau Manis, Padang 25163, Indonesia

***Corresponding author*

E-mail address: saka@energy.kyoto-u.ac.jp

**This work is an excerpt of PhD dissertation by F. Goembira in Kyoto University who is presently affiliated to Department of Environmental Engineering, Faculty of Engineering, Andalas University, Indonesia*

Abstract

Supercritical methyl acetate has been proven to convert triglycerides into fatty acid methyl esters (FAME) and triacetin. Due to the low reactivity of supercritical methyl acetate on triglycerides, reaction condition of 350°C/20MPa/45min is needed to obtain the highest yield of 96.7wt% FAME and 8.8wt% triacetin (total 105.5wt%). Yet, under such condition, thermal decomposition of products is inevitable, thus, further yield increments are hard to attain. This study was, therefore, done to know the possible use of additives in increasing the reaction rate of the supercritical process. Oleic acid, acetic acid, methanol and water were evaluated as the additives. It was discovered that acetic acid and water additions improved the performance of supercritical methyl acetate method. Surprisingly, when both additives were used simultaneously as aqueous acetic acid, the higher yield was obtainable at a lower reaction temperature. The addition of 10wt% aqueous acetic acid (25wt% concentration) at 300°C/20MPa/45min yielded 96.8wt% FAME and 12.9wt% triacetin (total 109.7wt%), thus, it is considered as a potential additive in biodiesel production by supercritical methyl acetate method.

Keywords: biodiesel, fatty acid methyl ester, triacetin, supercritical methyl acetate, aqueous acetic acid

1. Introduction

The worldwide increase in biodiesel production has led to glycerol market oversupply that reduces the value of the commodity. As a direct consequence, glycerol is no longer a value-added by-product in biodiesel production, thus, potentially increasing the cost of biodiesel production (Haas *et al.*, 2006). The inevitable formation of glycerol from biodiesel production is caused by the extensive use of transesterification reaction, as the most popular method in biodiesel production at the moment (Ayoub and Abdullah, 2012).

Theoretically, glycerol by-production can be prevented by interesterification reaction. In comparison, transesterification reaction uses short alkyl chain alcohols such as methanol, whereas for interesterification, carboxylate esters such as methyl acetate are applied in the reaction. As a result, instead of producing glycerol as a by-product, interesterification generates triacins, such as triacetin, tripropionin or tributyrin, depending on the type of carboxylate esters used in the reaction.

Saka (2005) invented non-catalytic supercritical methyl acetate method to produce fatty acid methyl esters (FAME) and triacetin, which are both miscible at room temperature under atmospheric pressure. This mixture hardly shows any detrimental effects on biodiesel properties, thus, both can be considered as biodiesel (Saka and Isayama, 2009). Additionally, for interesterification reaction of triglycerides, supercritical

methyl acetate gave the highest yield among various supercritical carboxylate esters (Goembira *et al.*, 2012).

Nevertheless, due to low reactivity of triglycerides to supercritical methyl acetate, reaction condition of 350°C/20MPa/45min at 42:1 molar ratio in methyl acetate to oil was needed for obtaining the high yield in biodiesel production (Goembira and Saka, 2012). Under such a reaction condition, thermal decomposition of some formed products would be possible to take place, thus, higher yields are hard to obtain from the non-catalytic supercritical process (Goembira and Saka, 2013).

This work was, therefore, carried out to find possible utilization of additives that can proceed the transesterification reaction by supercritical methyl acetate treatment under reaction conditions with the lower risks in thermal decomposition of products. Thereby, higher biodiesel yields are expected to be obtainable.

2. Experimental

2.1. Materials

Rapeseed oil (molecular weight = 883g/mol) with 0.01wt% free fatty acids (FFA) content and methyl acetate with purity more than 99wt% were utilized for biodiesel production by transesterification reaction under supercritical condition. As for the additives, oleic acid, acetic acid, methanol, distilled water (purity >99wt%) and various concentrations (26, 51 and 76wt%) of aqueous acetic acid were used in

this study. Moreover, analytical grade of various individual FAME compounds consisted of methyl palmitate (C16:0), methyl stearate (C18:0), methyl oleate (C18:1), methyl linoleate (C18:2) and methyl linolenate (C18:3) together with triacetin were applied as standard compounds for analytical purposes. All chemicals were purchased from Nacalai Tesque Inc., Kyoto, Japan.

2.2. Methods

Supercritical methyl acetate treatment was carried out in a batch-type reaction system that consisted of a batch reaction vessel, a molten tin bath for supercritical treatment and water bath for quenching the reaction vessel to stop the supercritical process. The reaction vessel is equipped with a thermocouple and a pressure gauge to accurately monitor the reaction temperature and pressure, respectively. In addition, the reaction vessel has a gas charging inlet that was used to increase initial pressure by the addition of pressurized nitrogen gas in the vessel, thereby the final reaction pressure can be adjusted. Moreover, corrosive-resistant reaction vessel is made of Inconel-625 special alloy that can be used under high temperatures and pressures up to 500°C and 200MPa, respectively. To carry out a supercritical methyl acetate treatment under a determined reaction condition, all reagents were placed into the reaction vessel based on the molar ratio used in this study. Afterwards, without charging the unit with pressurized nitrogen, a supercritical treatment was carried out to know the final reaction

pressure under such reaction condition. The value of final reaction pressure was then utilized for determining additional initial pressure by charging the reaction vessel by pressurized nitrogen. In that way, the reaction pressure can be adjusted in the batch-reaction system.

After removing unreacted methyl acetate and additives by vacuum evaporation instrument, obtained products were analyzed by using high performance liquid chromatography (HPLC) with a refractive index detector (RID). Cadenza CD-C18 was used as the column with methanol as the mobile phase at 1mL/min flow-rate. The oven temperature was set 40°C and 10µL of methanol-diluted sample was injected by auto-injector device into the HPLC.

Identification of products was carried out by comparing their retention times with the ones obtained from standard compounds. On the other hand, calibration curves of standard compounds were used to quantify the products based on the peak areas that are identified from HPLC chromatograms. Product yield was calculated from the weight of products divided by their theoretically obtainable weights based on the weight of triglycerides. Theoretically, in supercritical methyl acetate interesterification of triglycerides, the maximum product yield is 125wt% that consists of 100 and 25wt% of FAME and triacetin, respectively.

3. Results and discussion

3.1 Effect of various additives on supercritical methyl acetate

Fig. 1 shows the effect of 10wt% addition of various additives on product yields from supercritical treatment of rapeseed oil at 350°C/20MPa/42 molar ratio. If we define the process performance as the amount of total FAME and triacetin produced, we can clearly see that only acetic acid and water additions can give better performance to the supercritical process.

In the case of acetic acid addition, the highest yield was obtained at 45min reaction time, i.e., 94.2 and 14.1wt% FAME and triacetin, respectively (108.3wt% total yield). In comparison, under the same reaction condition, 96.7wt% FAME and 8.8wt% triacetin (105.5wt% total yield) were obtained in the absence of the additive. Campanelli *et al.* (2009) reported the same behavior from the addition of acetic acid in supercritical methyl acetate treatment for biodiesel production. This situation was most likely due to the acidolysis of triglycerides by acetic acid that increased the formation of triacetin and the availability of FFA in the process. This finding is in accordance with the one published by Saka *et al.* (2009), which demonstrates that triglycerides can be acidolyzed by acetic acid under its subcritical state to produce FFA and triacetin. Since FFA has higher reactivity than triglycerides towards supercritical methyl acetate (Saka and Isayama, 2009), higher yields were achievable.

On the other hand, the addition of 10wt% water to the same reaction condition mentioned earlier resulted in significant yield increase

under a shorter reaction time. The highest total yield of 99.4wt% (91.1wt% FAME and 8.3wt% triacetin) was obtained in 15min reaction time due to the presence of water as an additive. In comparison, only 70.9wt% FAME and 3.3wt% triacetin (total yield of 74.2wt%) were acquired under the same condition but without the additive addition. The increase of reaction rate due to the addition of water as an additive was presumably due to the hydrolysis process of triglycerides by water to produce FFA and glycerol. As stated earlier, FFA has higher reactivity than triglycerides towards supercritical methyl acetate, thus, higher yields were possible at shorter reaction time if the triglycerides were already hydrolyzed into FFA and glycerol.

3.2 Potential additive for supercritical methyl acetate

In order to know the potential of water or acetic acid as an additive, experiments were repeated under the same reaction condition but with various reaction temperatures. The results of this experiment are presented in Fig. 2. We can clearly observe from the figure that at reaction temperatures of 270 and 300°C, water addition gave higher product yields than the addition of acetic acid. This situation indicates that the hydrolysis proceeded faster than the acidolysis of triglycerides.

However, at this point, we can see that the individual addition of water or acetic acid to the supercritical methyl acetate process under reaction temperatures of 270 and 300°C could not give higher product yields than the one obtained at 350°C. It is, therefore, motivating to know

the simultaneous effect of those additives in the form of aqueous acetic acid ($\text{CH}_3\text{COOH}_{(\text{aq})}$) on the supercritical process.

Under the same reaction condition of $350^\circ\text{C}/20\text{MPa}$, 10wt% of three different concentrations of $\text{CH}_3\text{COOH}_{(\text{aq})}$, i.e., 26, 51 and 76wt% concentrations, was added to the supercritical methyl acetate treatment of rapeseed oil and the results are shown in Fig. 3. The highest yield of 93.1wt% FAME and 9.2wt% triacetin (total yield of 102.3wt%) was obtained at 15min reaction time, due to the addition of 10wt% $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration). Longer reaction time, however, resulted in lower yields.

On the other hand, the additions of higher $\text{CH}_3\text{COOH}_{(\text{aq})}$ concentrations, i.e., 51 and 76wt%, oppositely show the needs for longer reaction time to obtain the highest yield. It can, therefore, be concluded from these findings that the 26wt% concentration of $\text{CH}_3\text{COOH}_{(\text{aq})}$ was the most potential additive to improve the reaction rate of supercritical methyl acetate treatment in biodiesel production.

Fig. 4 shows HPLC chromatograms of products from supercritical methyl acetate treatment of rapeseed oil with 10wt% $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration). From this figure, we can see the absence of intermediate peaks in all reaction times, which indicates that the reaction was almost complete even at the shortest reaction time. The reduction of product yields under longer reaction time in supercritical treatments was most likely due to thermal decomposition of some

formed product, particularly the poly-unsaturated FAME, as reported by Imahara *et al.* (2008).

Furthermore, Fig. 5 shows the comparison of product yields from supercritical methyl acetate treatment of rapeseed oil under various reaction temperatures, with and without the addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration). We can see that the addition of the additive significantly improved the supercritical process by obtaining the highest total yield of 109.7wt% (96.8wt% FAME and 12.9wt% triacetin) at 300°C/20MPa/45min. On the other hand, a lower reaction temperature of 270°C under 20MPa in reaction pressure could not give any satisfactory yields, even though $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration) was employed as the additive.

Moreover, Fig. 6 shows the yields from supercritical methyl acetate treatment at 300°C/20MPa, with and without the addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration) under a prolonged reaction time up to 60min. The figure exhibits that reaction time more than 45min resulted in yield reduction in the process, which is most likely due to thermal decomposition of poly-unsaturated FAME. In comparison, under the same reaction condition, the absence of the additive resulted in 0wt% yield.

The increase of the product yield in the addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration) was presumably due to the simultaneous acidolysis and hydrolysis of triglycerides that increase the formation of

FAME and triacetin. Furthermore, the use of lower reaction temperature under high reaction pressure might contribute to lesser thermal decomposition from taking place, thus, higher product yields were achievable.

Based on these lines of evidence, it is clear that the addition of 10wt% $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration) has improved the reaction rate of supercritical methyl acetate method in biodiesel production, by producing higher product yields at lower reaction temperatures under high reaction pressure. The biodiesel production process with the addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ as an additive is shown in Fig. 7. In this process, oils are treated with supercritical methyl acetate in the presence of the additive. After removal of unreacted methyl acetate and the additive by a simple vacuum evaporation step, biodiesel that consists of FAME and triacetin is obtainable.

4. Concluding remarks

This study was done to improve the reaction rate of glycerol-free supercritical methyl acetate method in biodiesel production, by the application of additives in the process. Among various additives used in this study, acetic acid and water could improve the yields from the supercritical process by different roles. Acetic acid acidolyzed triglycerides to form triacetin and FFA, thus, higher product yields were observable due to direct formation of triacetin and higher reactivity of supercritical methyl acetate towards FFA as compared to triglycerides.

On the other hand, water addition promoted hydrolysis of triglycerides to generate FFA and glycerol, in which the formation of FAME in the supercritical process was enhanced. Moreover, the simultaneous effect of acetic acid and water was exhibited by the application of $\text{CH}_3\text{COOH}_{(\text{aq})}$ as an additive. The addition of 10wt% $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% concentration) in supercritical methyl acetate resulted in the highest total yield of 109.7wt% (96.8wt% FAME and 12.9wt% triacetin) under reaction condition of 300°C/20MPa/45min/42 molar ratio. The higher yield was not only resulted from the higher reaction rate due to the addition of the additive, but also due to the possible reduction in thermal decomposition of products under such a reaction condition.

References

- Ayoub M, Abdullah AZ (2012) Critical Review on the Current Scenario and Significance of Crude Glycerol Resulting from Biodiesel Industry towards More Sustainable Renewable Energy Industry. *Renewable and Sustainable Energy Reviews* 16:2671-2686.
- Campanelli, P, Banchemo M, Manna L (2010) Synthesis of Biodiesel from Edible, Non-Edible and Waste Cooking Oils via Supercritical Methyl Acetate Transesterification. *Fuel* 89:3675-3682.
- Goembira F, Saka S (2012) Factors Affecting Biodiesel Yield in Interesterification of Rapeseed Oil by Supercritical Methyl Acetate. In: Yao T (Ed.) *Zero-Carbon Energy Kyoto 2011, Green Energy and Technology*:147-152. Springer.
- Goembira F, Matsuura K, Saka S (2012) Biodiesel Production by Various Supercritical Carboxylate Esters. *Fuel* 97:373-378.

- Goembira F, Saka S (2013) Optimization of Biodiesel Production by Supercritical Methyl Acetate. *Bioresource Technology* 131:47-52.
- Haas MJ, McAloon AJ, Yee, WC, Foglia TA (2006) A Process Model to Estimate Biodiesel Production Cost. *Bioresource Technology* 97:671-678.
- Imahara H, Minami E, Hari S, Saka S (2008) Thermal Stability of Biodiesel in Supercritical Methanol. *Fuel* 87:1-6.
- Saka S (2005) Manufacturing Method for Fatty Acid Methyl Esters. Japan Patent no. 4378534 (application: 19 Dec 2005; granted: 2 Oct 2009).
- Saka S, Isayama Y (2009) A New Process for Catalyst-Free Production of Biodiesel Using Supercritical Methyl Acetate. *Fuel* 88:1307-1313.
- Saka S, Isayama Y, Ilham Z, Jiayu X (2009) New Process for Catalyst-Free Biodiesel Production Using Subcritical Acetic Acid and Supercritical Methanol. *Fuel* 89:1442-1446.

Figure Captions

- Fig. 1** Effect of 10wt% addition of various additives on supercritical methyl acetate treatment of rapeseed oil at 350°C/20MPa/42 molar ratio
- Fig. 2** Effect of 10wt% addition of a) water and b) acetic acid on supercritical methyl acetate treatment of rapeseed oil at 20MPa/42molar ratio and various reaction temperatures
- Fig. 3** Effect of 10wt% addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ under various concentrations on supercritical methyl acetate treatment of rapeseed oil at 350°C/ 20MPa/42 molar ratio
- Fig.4** HPLC chromatograms from supercritical methyl acetate treatment of rapeseed oil at 350°C/ 20MPa/42 molar ratio with 10wt% addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% conc.)
- Fig.5** Effect of a) no additives and b) 10wt% addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% conc.) on supercritical methyl acetate treatment of rapeseed oil under 20MPa/42 molar ratio and various reaction temperatures
- Fig. 6** Yield from supercritical methyl acetate treatment of rapeseed oil at 300°C/20MPa/42:1 (mol/mol) with/without $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% conc.) additions
- Fig. 7** Supercritical methyl acetate method with 10wt% $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% conc.) addition as an additive

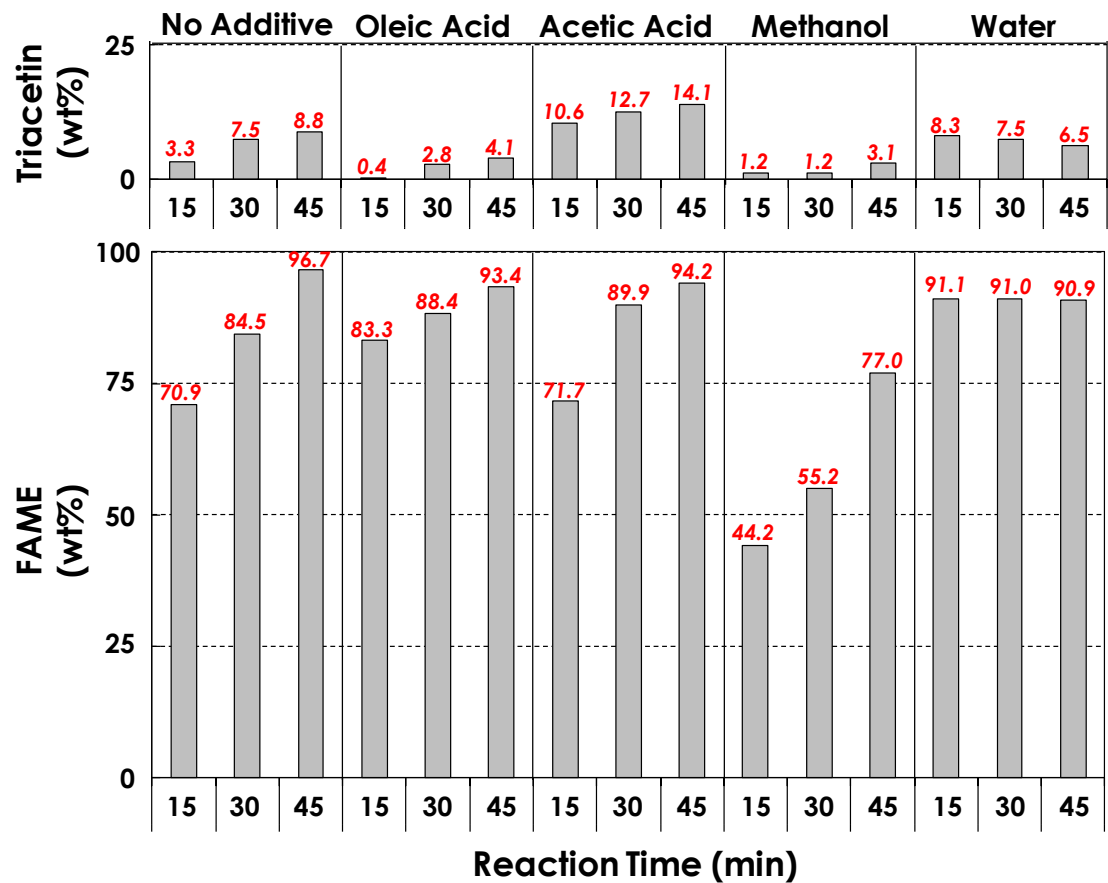


Fig. 1 Effect of 10wt% addition of various additives on supercritical methyl acetate treatment of rapeseed oil at 350°C/20MPa/42 molar ratio

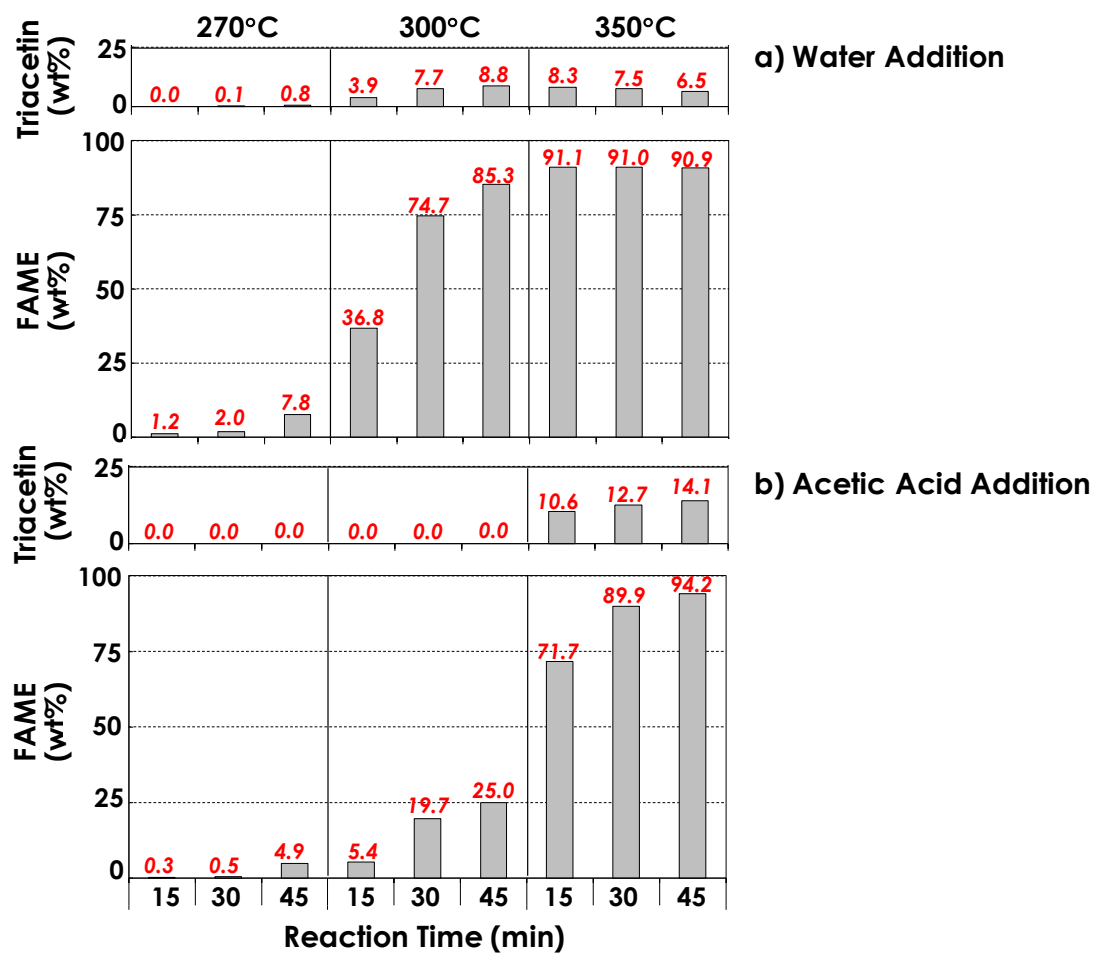


Fig. 2 Effect of 10wt% addition of a) water and b) acetic acid on supercritical methyl acetate treatment of rapeseed oil at 20MPa/42molar ratio and various reaction temperatures

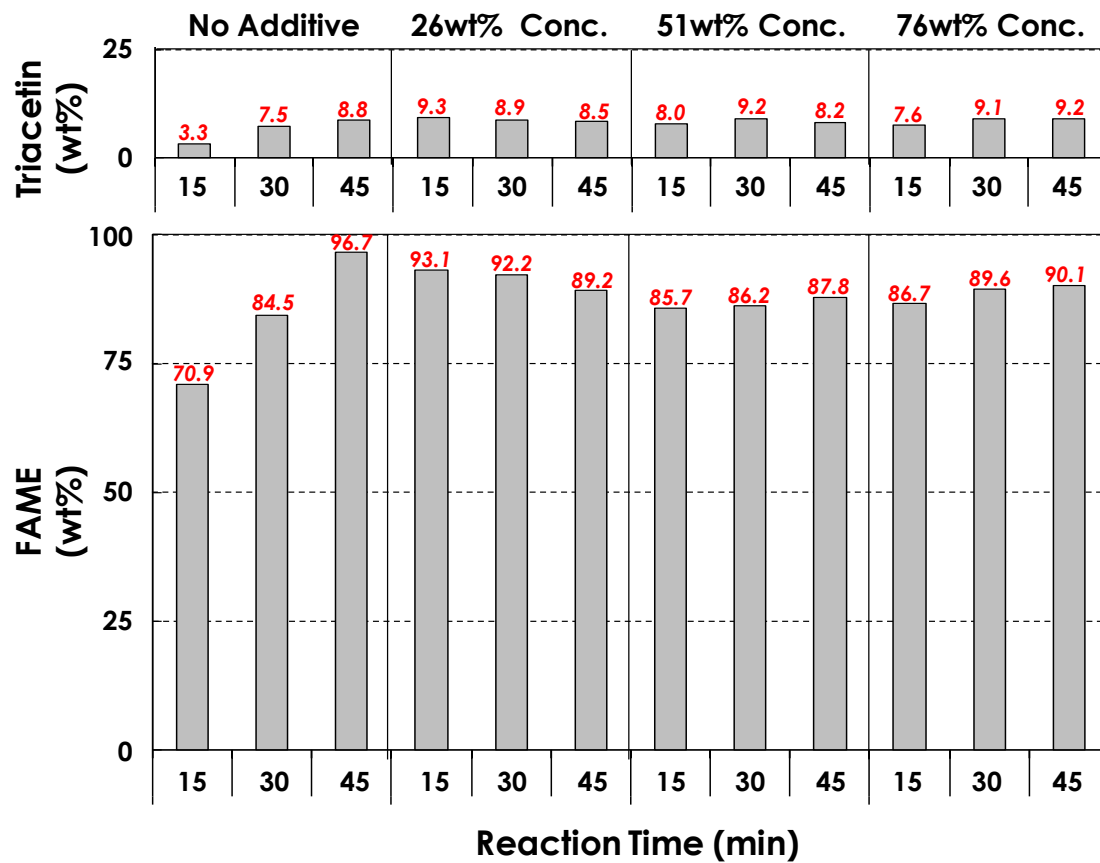


Fig. 3 Effect of 10wt% addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ under various concentrations on supercritical methyl acetate treatment of rapeseed oil at $350^\circ\text{C}/20\text{MPa}/42$ molar ratio

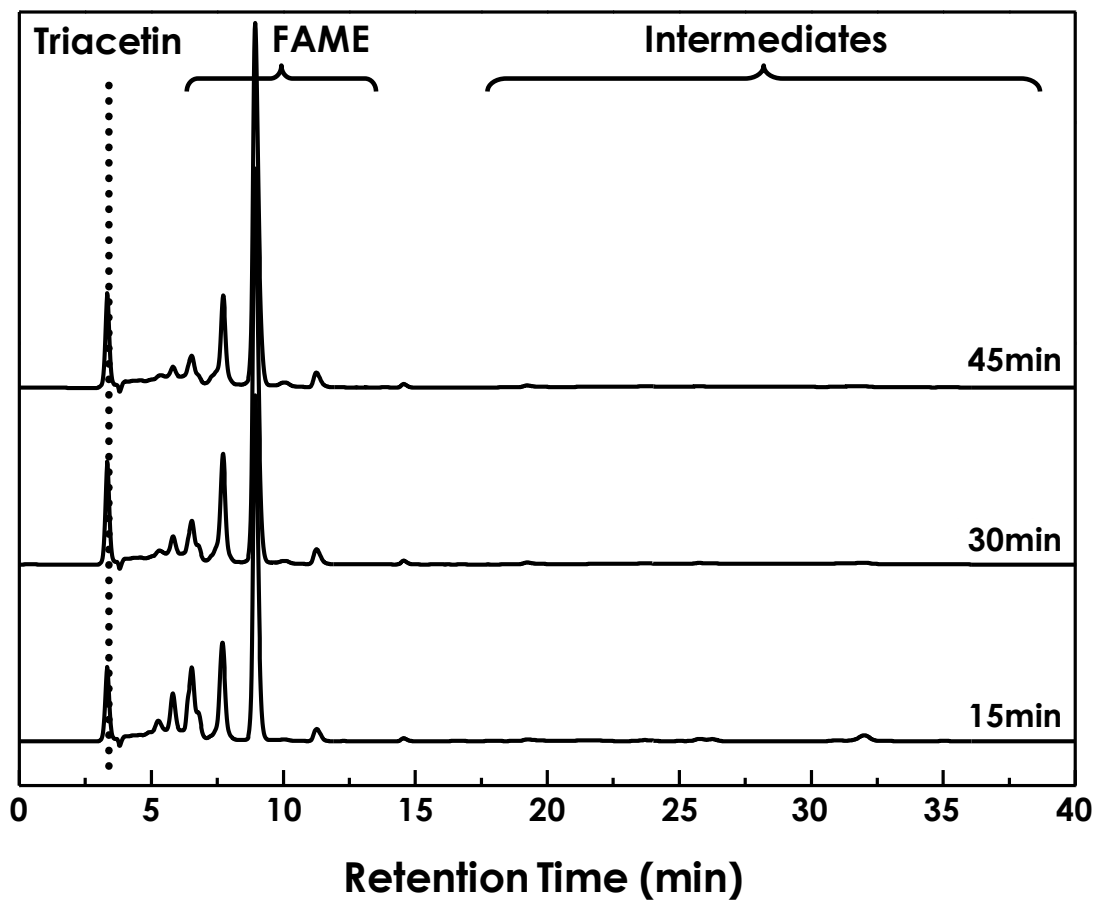


Fig. 4 HPLC chromatograms from supercritical methyl acetate treatment of rapeseed oil at 350°C/20MPa/42 molar ratio with 10wt% addition of $\text{CH}_3\text{COOH}_{(\text{aq})}$ (26wt% conc.)

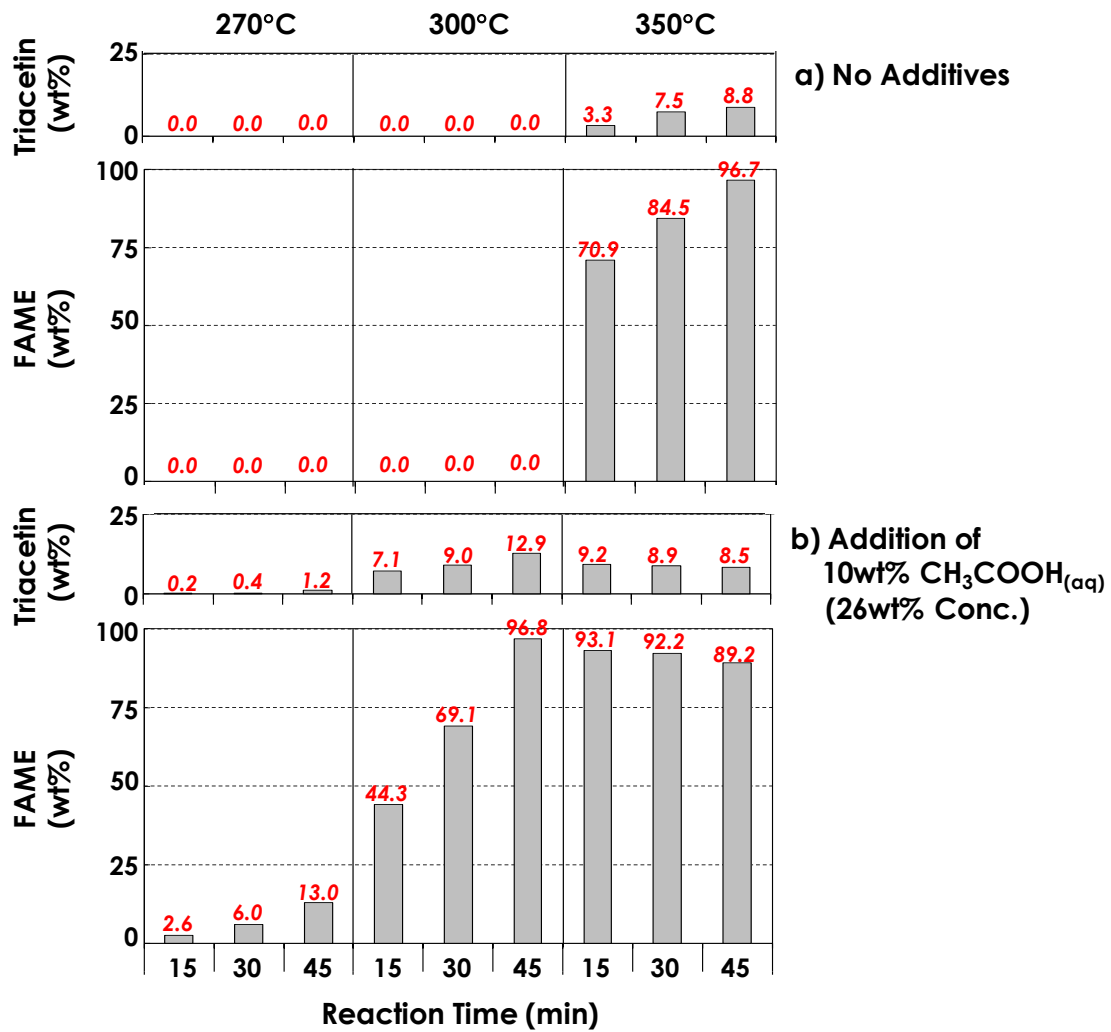


Fig.5 Effect of a) no additives and b) 10wt% addition of CH₃COOH_(aq) (26wt% conc.) on supercritical methyl acetate treatment of rapeseed oil under 20MPa/42 molar ratio and various reaction temperatures

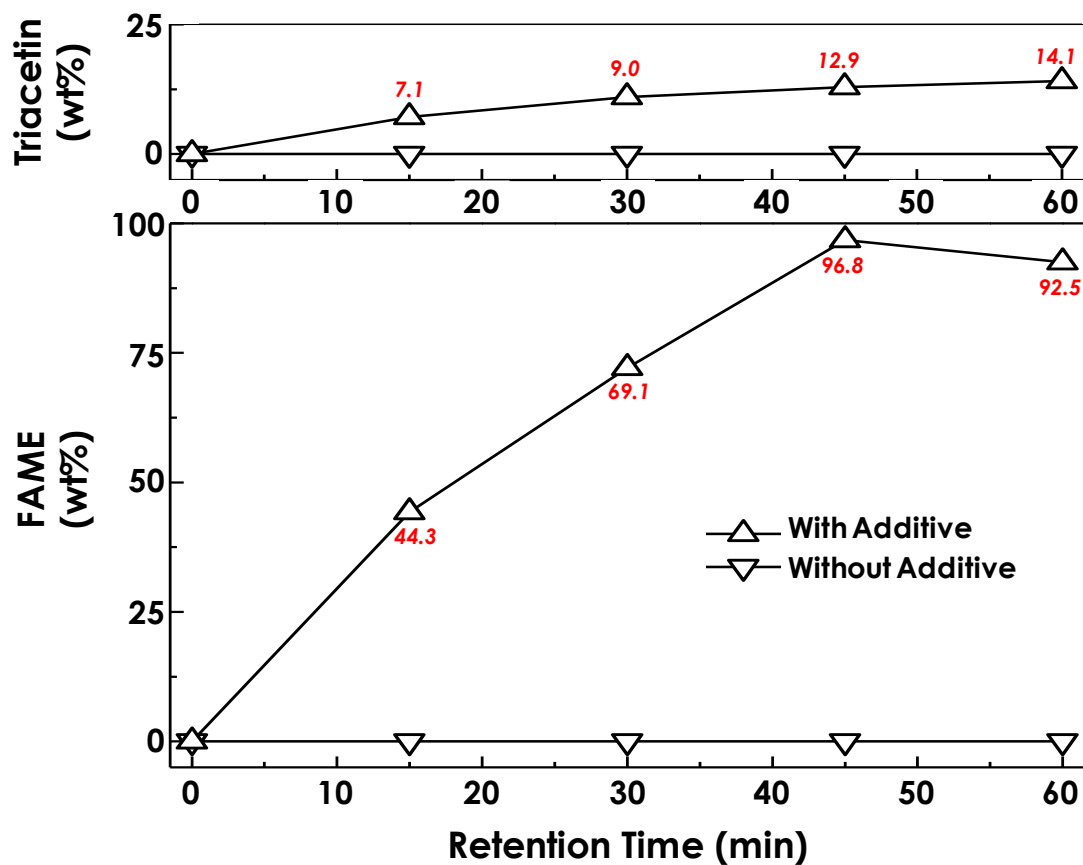


Fig. 6 Yield from supercritical methyl acetate treatment of rapeseed oil at 300°C/20MPa/42:1 (mol/mol) with/without CH₃COOH₍₁₀₀₎ (26wt% conc.) additions

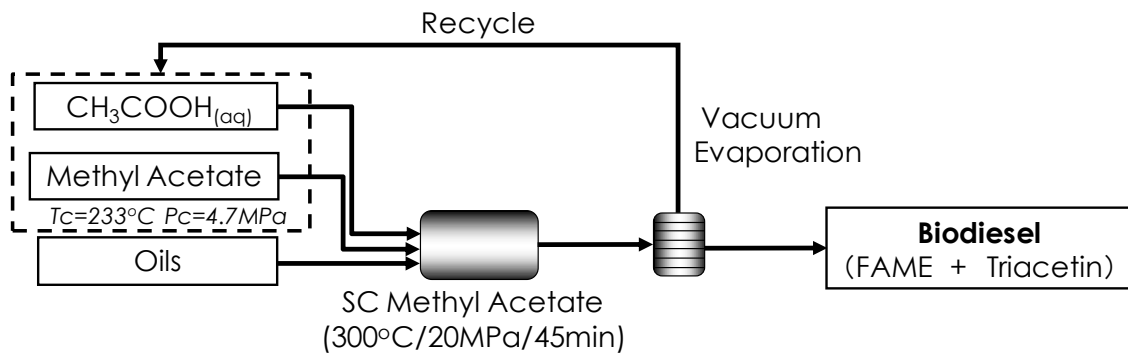


Fig. 7 Supercritical methyl acetate method with 10wt% $\text{CH}_3\text{COOH}_{(aq)}$ (26wt% conc.) addition as an additive