

Nutrients and Suspended Sediment Load Estimates for the Ishikari River Basin, Japan, Over a Decade

Weili DUAN⁽¹⁾, Kaoru TAKARA, Bin HE, Pingping LUO, Daniel NOVER⁽²⁾
and Yosuke YAMASHIKI

(1) Department of Civil and Earth Resources Engineering, Graduate School of Engineering, Kyoto University
(Kyoto daigaku-Katsura, Nishikyo-ku, Kyoto 615-8530, Japan)

(2) AAAS Science and Technology Policy Fellow, U.S. EPA, ORD, NCEA, Washington, DC,
20010

Synopsis

The load estimation process for nutrients (nitrogen and phosphorus) and suspended sediment (SS) is complicated because of retransformation bias, data censoring, and non-normality. To obtain reliable unbiased estimates, the regression model Load Estimator (LOADEST) was applied to estimate total nitrogen (TN), total phosphorus (TP) and SS loads at five sites in the Ishikari River Basin, Japan, from 2000 to 2010. Coefficients of determination (R^2) for the best-fit regression models for loads of TN, TP, and SS for the five sites ranged from 75.36 % to 92.37 %, suggesting the model for all three constituents successfully simulated the variability in constituent loads at all sites. Moreover, the estimated seasonal loads fluctuated widely during 2000 to 2010, with the greatest loads occurring in spring and the smallest loads occurring in winter. Accurately estimated loads are essential for effective water resources management efforts.

Keywords: nitrogen, phosphorus, suspended sediment, LOADEST, Ishikari River basin

1. Introduction

Surface water quality has important effects on aquatic ecosystems and human health. Nutrients (primarily nitrogen and phosphorus) are essential for plant and animal life, but in high concentrations they can cause lots of ecological problems including algal blooms, decreased dissolved oxygen concentrations, and increased fish mortality (Carpenter et al., 1998; Sprague and Lorenz, 2009). Suspended sediment (SS, soil and other particulate matter) is ubiquitous in aquatic ecosystems and contributes to bottom material composition, water-column turbidity, and chemical constituent transport. But excessive amounts of SS can degrade water quality and harm aquatic ecosystems through physical, biological, and chemical processes (Terrio, 2007). It is crucial to explore the temporal dynamics of nutrients and SS concentrations and loads in surface waters to effectively manage and protect water resources (Gruber and Galloway, 2008; Sprague and Lorenz, 2009).

Nutrients and SS concentrations and loads are generally estimated using models on the basis of infrequent and incomplete monitoring data (Armour et

al., 2009; Duan et al., 2012; He et al., 2011; He et al., 2009; Luo et al., 2011). In addition, few estimates of nutrient loads reported in the literature present associated uncertainties (Kulasova et al., 2012). Observational uncertainty is critically important in defining and contributing to parametric uncertainty and errors in the conceptual models underpinning diffuse pollution research and management. Many countries have therefore developed monitoring programs and protocols such as the National Monitoring and Assessment Programme (NOVA) in Denmark (Conley et al., 2002; Kronvang et al., 2005), the Harmonised Monitoring Scheme (HMS) in Britain (Hurley et al., 1996; Morvan et al., 2008), and the National Water-Quality Assessment (NAWQA) in US (Gilliom et al., 1995; Rosen and Lapham, 2008), which enable a reliable quantification of nitrogen (N), phosphorus (P), and SS loadings and concentrations in the aquatic environment. Meanwhile, load estimating methods and models have improved substantially (Shrestha et al., 2008). In Japan, relevant efforts in water management have led to significant improvements in the estimation of water quality. For example, a nationwide data collection network (<http://www1.river.go.jp/>) called the National Land with

Water Information has been established to provide real-time water information including water quality, precipitation, and river discharge data. These monitoring systems are essential for evaluating and understanding the various hydrologic and biogeochemical processes governing water quality and nutrient cycling in watersheds and their ecological impacts. Because the load estimation process is complicated by retransformation bias (Ferguson, 1986; Webb et al., 1997), data censoring (Gilbert, 1987), and non-normality (Helsel and Hirsch, 1992; Shumway et al., 2002), only one fraction of the total nutrient load can usually be estimated in many modeling studies (Johnes, 2007). There is therefore an urgent need to improve estimation methods to compliment improving monitoring programs and resolve common shortcomings in estimation methods.

In this study, we introduce a methodology for the quantification of TN, TP, and SS loads in receiving waters associated with rivers. We describe a procedure for estimation of constituent loads in rivers which have been subject to only sparse measurements of flow and water quality constituents. The primary goal of this study was to estimate seasonal TN, TP, and SS loads using regression methods on the basis of instantaneous samples.

2. Materials and methods

2.1 Study area and data collection

The Ishikari River basin is located in central Hokkaido Island within the range of 43° N and 44° N, with total drainage area of 14,330 km² (see Fig.1). The Ishikari River originates from Mt. Ishikaridake (elev. 1967 m) in the Taisetsu Mountains of central Hokkaido, and then flows southward into the broad Ishikari Plain and finally into the Japan Sea. The length of the Ishikari River mainstream is 268 km and ranks third longest river in Japan. Major tributaries of the river include the Chūbetsu, Uryū, Sorachi, and Toyohira. The highest elevation in the Ishikari Plain is less than 50 m and the plain is bordered by a mountain range with peaks exceeding 1,000 m in elevation. At the Sapporo weather station (elev. 17 m), monthly air temperature in the warmest month (August) is 22.0 °C, and the coldest month (January) is -4.1 °C. Snow cover in Sapporo lasts for approximately four months from December to March. Average annual snowfall is 630cm, and the years deepest snow depth averages 101cm (normal value 1970-2000) (USUTANI and NAKATSUGAWA, 2006).

Five monitoring sites were chosen for analysis in this study (see Fig.1). Sites Yinou-oohashi, Yiwamizawao-oohashi, and Yishikarikakou-bashi are located in the upper, middle and lower reaches of the mainstem, respectively, while sites Akane-bashi and Umaoyi-bashi are located in the Uryū and Yūbari Tributaries, respectively. Samples of water quality (TN, TP, and SS) concentration and river discharge were collected at each site from 2000 to 2010 by the National

Land with Water Information (<http://www1.river.go.jp/>) monitoring network. In general, water quality concentration and river discharge were measured and collected once a month at each site. Monthly samples were collected at sites Akane-bashi, Yinou-oohashi, and Umaoyi-bashi, with a total number of 132 for each testing parameter at each site; 94 samples were collected for each testing parameter at Sites Yiwamizawao-oohashi and Yishikarikakou-bashi.

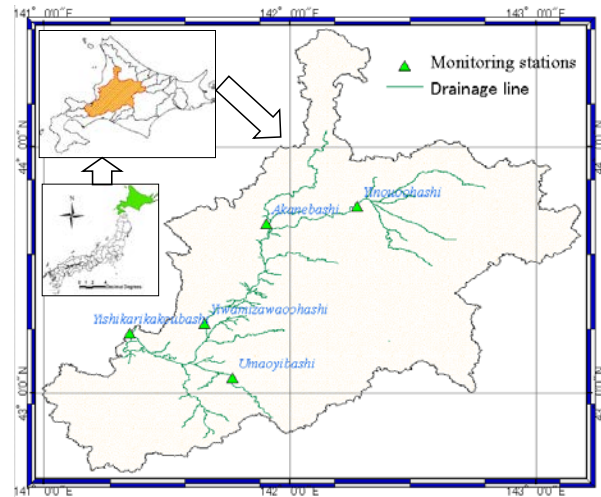


Fig.1 Study area, and monitoring stations for the Ishikari River basin

2.2 Methods

Stream-water SS or chemical constituent load (Φ) can be calculated using constituent concentration (C) and discharge (Q) integrated over time (t):

$$\Phi = \int C(t)Q(t)dt \quad (1)$$

A continuous record of concentration and discharge is required to estimate loads using the integral in equation 1. Although discharge can be easily measured at a sufficiently high frequency, however, the expense of collecting and analyzing samples for water quality constituents means it is often difficult to obtain continuous data. Equation 1 can therefore be written as:

$$L_T = \Delta t \sum_{i=1}^n L_i \quad (2)$$

Where L_T is an estimate of total load, L_i is an estimate of instantaneous load, n is the number of discrete points in time, and Δt is the time interval represented by the instantaneous load.

In addition, the FORTRAN Load Estimator (LOADEST) uses time-series streamflow data and constituent concentrations to calibrate a regression model that describes constituent loads in terms of various functions of streamflow and time, enabling a direct calculation of equation 2 (Runkel et al., 2004). LOADEST performs calibration procedures and makes load estimates with four statistical estimation methods: Adjusted Maximum Likelihood Estimation (AMLE), Maximum Likelihood Estimation (MLE), Linear Attribution Method (LAM), and Least Absolute

Deviation (LAD). AMLE and MLE are suitable when the model calibration errors (residuals) are normally distributed; AMLE is the more appropriate method of the two when the calibration data set contains censored data (that are reported as less than or greater than some threshold). LAM and LAD are useful when the residuals are not normally distributed. Because the input data in this study included censored data, and because the model calibration residuals were normally distributed within acceptable limits, the AMLE estimation method was selected in each site. The output regression model equations take the following general form (Runkel et al., 2004):

$$\ln(L_i) = a + b \ln Q + c \ln Q^2 + d \sin(2\pi dtime) + e \cos(2\pi dtime) + f dtime + g dtime^2 + \varepsilon \quad (3)$$

Where $\ln$ is the natural logarithm; L_i is the calculated load for sample i ; Q is stream discharge; $dtime$ is time, in decimal years from the beginning of the calibration period; ε is error; and a, b, c, d, e, f, g are the fitted parameters in the multiple regression model. Some of the regression equations in this study did not include all of the above terms, depending on the lowest Akaike Information Criterion (AIC) values (Sakamoto et al., 1986).

$$AIC = 2k - 2\ln(L) \quad (4)$$

Where k is the number of parameters in the statistical model, and L is the maximized value of the likelihood function for the estimated model.

Combining the equations above, monthly and seasonal average TN, TP and SS loads were calculated. The seasons were considered in the following way: winter (December, January, February); spring (March, April, May); summer (June, July, August); autumn (September, October, November).

3. Results and discussions

3.1 Regression evaluation

Coefficients of determination (R^2) for the best-fit regression models for loads of TN, TP, and SS for the five studied sites (Table 1) performed well (site Akane-bashi was the best), ranging from 75.36 % to 92.37 %, which indicated that, with few exceptions, the models for all three constituents successfully simulated the variability in constituent loads at all sites.

Meanwhile, according the calibrated data at each site, different models were selected on basis of the lowest AIC and then coefficients were calculated using the AMLE (Table 1). For TN estimation at site Akane-bashi, the lowest of AIC was 0.640 and the coefficients a, b, c, d, e, f , and g were 7.3230, 1.0553, -0.0261, -0.2401, -0.0679, 0.0034, and 0.0063; while at site Umaoyi-bashi, the lowest of AIC was 1.128 and the coefficients only had a (6.1154) and b (0.9993).

3.2 Estimated loads

For the sake of brevity, only monthly average TN, TP, and SS loads at site Akane-bashi are displayed in time-series graphs (Fig. 2). As a measure of error associated with monthly average load estimates, the upper and lower 95-percent confidence intervals are also presented in Fig. 2, showing in most cases the measured loads track very closely with model estimations with little systematic underestimation or overestimation in load, which are in accordance with the result of Table 1. At site Akane-bashi, monthly average TN, TP, and SS loads ranged from 40.06 to 24 198.00 kg/day, 7.03 to 3 025 kg/day, and 662.00 to 5802 000.00 kg/day, respectively. At all sites, monthly average TN, TP, and SS loads displayed seasonal fluctuations in both loads and in discharge from 2000 to 2010, even though the dates of peak discharge were not the same every year.

Table 1 Regression coefficients, coefficients of determination (R^2) and AIC for load models used to estimate TN, TP, and SS at five sites in the Ishikari River basin, Japan, 2000-2010.

Site name	Regression Coefficient							R ² (%)	AIC
	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i>	<i>f</i>	<i>g</i>		
TN									
Akane-bashi	7.3230	1.0553	-0.0261	-0.2401	-0.0679	0.0034	0.0063	92.37	0.640
Yinou-oohashi	8.9870	0.9728	0.1712	-0.1830	-0.1826			80.58	0.224
Yiwamizawa-oohashi	10.0929	0.9067	0.1399	0.1790				90.95	-0.468
Yishikarikakou-bashi	10.7065	0.8580	-0.0884	0.1172	0.1679	0.01920		83.01	0.002
Umaoyi-bashi	6.1154	0.9993						88.08	1.128
TP									
Akane-bashi	4.6447	1.0492	0.0155	-0.0423	0.5761	-0.0382	0.0132	89.22	1.246
Yinou-oohashi	5.8819	1.0057	0.2986	-0.1936	0.1403	-0.0200		73.56	1.125
Yiwamizawa-oohashi	7.2254	1.3063	0.1654	0.0961	-0.2149			84.70	1.099
Yishikarikakou-bashi	7.8004	1.1607	0.1373	0.0418	-0.1754			89.40	0.341
Umaoyi-bashi	3.2585	1.2014	0.0640	0.1210	0.3819	-0.0505		91.80	1.241
SS									
Akane-bashi	10.3793	1.5759	0.0522	0.0476	0.4572	-0.0998	0.0230	87.39	2.105
Yinou-oohashi	11.4478	1.4868	0.6994	-0.1106	0.1899	-0.0588		76.14	1.747
Yiwamizawa-oohashi	13.0451	1.9803	0.3337	-0.0919	-0.3573	-0.0408		85.35	1.868
Yishikarikakou-bashi	12.9587	2.1178	0.3605	-0.2020	-0.4147	-0.0528		86.07	1.909
Umaoyi-bashi	9.5146	1.4798	0.1353	0.2914	0.4047	-0.1122		83.68	2.447

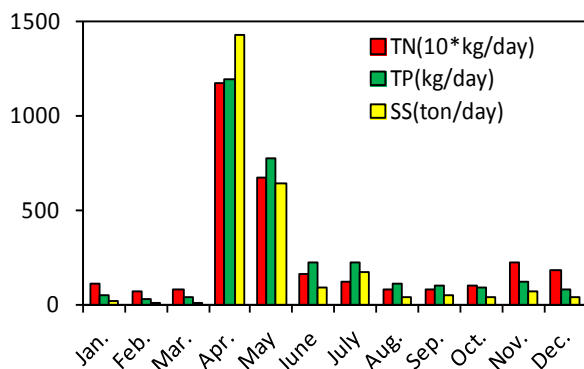


Fig.3 Estimated average loads of TN, TP, and SS, by month, at site Akane-bashi, 2000 to 2010.

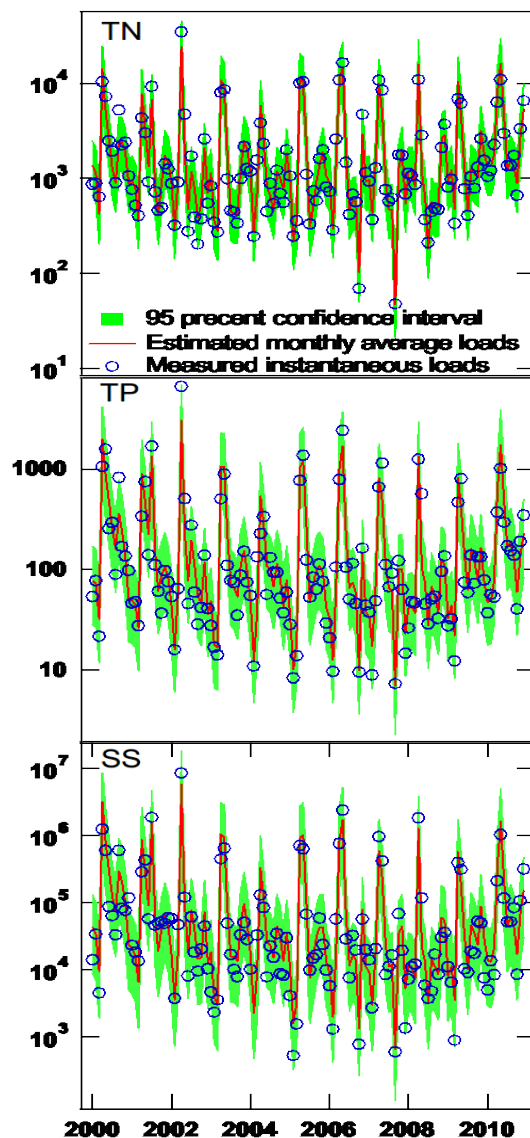


Fig.2 Estimated monthly average and measured loads (kg/day) of TN, TP, and SS at site Akane-bashi, 2000 to 2010

Figure 3 shows the estimated average loads of TN, TP, and SS by month at site Akane-bashi, 2000 to 2010, calculated by averaging the monthly averages for each month of the year (for example, the average of all

January monthly averages, all February monthly averages, and so on). As can be seen from Fig. 3, the estimated average loads of TN, TP, and SS in April had the largest loads, the values of which were 11 720.0 kg/day, 1 191.00 kg/day and 1 429.09 ton/day, respectively; while January, February and March had relatively low loads. The results of other sites were similar to these.

Estimated seasonal loads of TN, TP, and SS at five sites were highly variable in 2000 and 2010 in the Ishikari River and its tributaries, with the greatest loads occurring in the spring and the smallest loads occurring in the winter (Table 2), reflecting fluctuations in discharge as a result of the combined effects of seasonal runoff patterns, the exact timing of which vary from year to year. At site Yishikarikakou-bashi, TN load decreased from 68 536 kg/day in spring to 36 064 kg/day in winter, TP load decreased from 7 098 to 1 439 kg/day, and SS decreased from 5803 000 to 212 497 kg/day. Seasonal alteration was consistent with monthly alteration (Fig. 3).

Whatever the season, site Yishikarikakou-bashi had the largest loads of TN, TP, and SS, far better than at other sites, the seasonal mean of which were 46 702 kg/day, 3 560 kg/day and 1 991 033 kg/day (Table 3).

Table 2 Estimated seasonal average loads (kg/day) in five sites in Ishikari River basin, from 2000 to 2010

Site name	Spring	Summer	Autumn	Winter
TN				
Akanebashi	6424	1207	1361	1176
Yinouoohashi	15639	8166	6582	6590
Yiwamizawaoohashi	41427	15816	20072	16719
Yishikarikakoubashi	68536	39480	42242	36064
Umaoyibashi	2361	1213	920	947
TP				
Akane-bashi	669.06	181.89	102.88	51.24
Yinouoohashi	993	528	285.44	240.06
Yiwamizawa-oohashi	5022	1345	1120	618.9
Yishikarikakoubashi	7098	3233	2407	1439
Umaoyibashi	302.97	162.81	72.7	50.71
SS				
Akane-bashi	692088	97510	51964	21484
Yinou-oohashi	656252	197399	84867	60617
Yiwamizawa-oohashi	4633677	643348	481725	170036
Yishikarikakou-bashi	5.80E+06	1154298	705433	212479
Umaoyi-bashi	518835	273043	88395	49256

Table 3 Seasonal average loads (kg/day) in five sites in Ishikari River basin, from 2000 to 2010

Site name	TN	TP	SS
Akanebashi	2542.00	251.27	215761.00
Yinouoohashi	9244.00	511.59	249784.00
Yiwamizawaoohashi	23627.00	2043.00	1501764.00
Yishikarikakoubashi	46702.00	3560.00	1991033.00
Umaoyibashi	1360.00	147.30	232382.00

(4) Discussions

Based on the lowest of *AIC* of different models, the best models were chosen to estimate constituents at each site (Table 1), which can better simulate changes of concentrations and loads. For example, *d*, and *e* can directly show seasonal variation; that is, the bigger of the absolute value of *d*, and *e*, the larger of seasonal changes (Runkel et al., 2004). Meanwhile, calibrate data was used to calculate the coefficients using the AMLE method, which can eliminate the influence of censored data as much as possible. Data censoring that means less than the laboratory detection limit is common in measuring the constituent concentration, which specified by using a less-than sign (<) as the first character in this study. The performance of models was measured using R^2 , showing good results.

Site Yishikarikakou-bashi had the highest loads of TN, TP, and SS, both in monthly and seasonal loads (Fig. 4, Table 2), because this site is located in the lower reaches of the Ishikari River and has the highest average discharge, which is the primary driver of delivery of all the constituents to the coastal waters (Fig. 4).

The estimated loads at all sites were greatest in spring, while lowest in winter. The Ishikari River basin is located in the northern part of Japan in central Hokkaido and therefore experiences large seasonal discharges associated with spring snowmelt. Floods in the Ishikari River Basin tend to occur in April and May, possibly explaining why the estimated loads were greatest in spring.

4. Conclusions

We estimate monthly and seasonal average River Basin, Japan, from 2000 to 2010, using the LOADEST regression model. Some important and interesting conclusions can be summarized as follows:

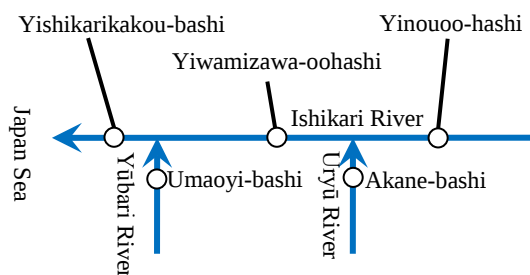


Fig.4 Schematic diagram of the Ishikari River basin and five studied sites.

(1) Best-fit (R^2) regression models for loads of TN, TP, and SS for the five studied sites ranged from 75.36 % to 92.37 %, suggesting that the model for all three constituents successfully simulated the variability in constituent loads at all sites. Using the AMLE method, the influence of the data censoring was eliminated as much as possible.

(2) The estimated average loads of TN, TP, and SS by month were highly variable at five sites in the Ishikari River basin, between 2000 and 2010. For example, at site Akane-bashi, April had the largest loads, the values of which were 11720.0 kg/day, 1191.00 kg/day and 1429.09 ton/day, respectively; while January, February and March had relatively low loads.

(3) The estimated seasonal loads of TN, TP, and SS at five sites were highly variable in 2000 and 2010 in the Ishikari River and its tributaries, with the greatest loads occurring in the spring and the smallest loads occurring in the winter, reflecting fluctuations in discharge as a result of the combined effects of seasonal runoff patterns, the exact timing of which vary from year to year.

(4) Site Yishikarikakou-bashi is located in the lower reaches of the Ishikari River and has the highest average discharge, meaning the primary driver of delivery of all the constituents to the coastal waters. It therefore had the highest loads of TN, TP, and SS, both in monthly and seasonal loads.

Acknowledgements

This study is sponsored by the Kyoto University Global COE program “Sustainability/Survivability Science for a Resilient Society Adaptable to Extreme Weather Conditions” and “Global Center for Education and Research on Human Security Engineering for Asian Megacities”, the Postdoctoral fellowship of Japan Society for the Promotion of Science (P12055) and the JSPS Grant-in-Aid for Young Scientists (B) (KAKENHI Wakate B, 90569724).

References

- Armour, J.D., Hateley, L.R., Pitt, G.L. (2009): Catchment modelling of sediment, nitrogen and phosphorus nutrient loads with SedNet/ANNEX in the Tully–Murray basin, *Marine and Freshwater Research*, Vol. 60, No. 11, pp. 1091-1096.
- Carpenter, S.R., Caraco, N.F., Correll, D.L., Howarth, R.W., Sharpley, A.N., Smith, V.H. (1998): Nonpoint pollution of surface waters with phosphorus and nitrogen, *Ecological Applications*, Vol. 8, No. 3, pp. 559-568.
- Conley, D.J., Markager, S., Andersen, J., Ellermann, T., Svendsen, L.M. (2002): Coastal eutrophication and the Danish national aquatic monitoring and assessment program, *Estuaries and Coasts*, Vol. 25, No. 4b, pp. 848-861.
- Duan, W.L., He, B., Takara, K., Luo, P.P., Yamashiki, Y. (2012): Estimating the Sources and Transport of

- Nitrogen Pollution in the Ishikari River Basin, Japan, *Advanced Materials Research*, Vol. 518, pp. 3007-3010.
- Ferguson, R.I. (1986): River loads underestimated by rating curves, *Water Resources Research*, Vol. 22, No. 1, pp. 74-76.
- Gilbert, R.O. (1987): *Statistical methods for environmental pollution monitoring*, Wiley.
- Gilliom, R.J., Alley, W.M., Gurtz, M.E. (1995): *Design of National Water-Quality Assessment Program*, United States Government Print.
- Gruber, N., Galloway, J.N. (2008): An Earth-system perspective of the global nitrogen cycle, *Nature*, Vol. 451, pp. 293-296.
- He, B., Kanae, S., Oki, T., Hirabayashi, Y., Yamashiki, Y., Takara, K. (2011): Assessment of global nitrogen pollution in rivers using an integrated biogeochemical modeling framework, *Water Research*, Vol. 45, No. 8, pp. 2573-2586.
- He, B., Oki, T., Kanae, S., Mouri, G., Kodama, K., Komori, D., Seto, S. (2009): Integrated biogeochemical modelling of nitrogen load from anthropogenic and natural sources in Japan, *Ecological Modelling*, Vol. 220, No. 18, pp. 2325-2334.
- Helsel, D.R., Hirsch, R.M. (1992): *Statistical methods in water resources*, Elsevier Science.
- Hurley, M.A., Currie, J.E., Gough, J. (1996): Butterwick, C., A framework for the analysis of harmonised monitoring scheme data for England and Wales, *Environmetrics*, Vol. 7, No. 4, pp. 379-390.
- Johnes, P.J. (2007): Uncertainties in annual riverine phosphorus load estimation: impact of load estimation methodology, sampling frequency, baseflow index and catchment population density, *Journal of Hydrology*, Vol. 332, No. 1, pp. 241-258.
- Kulasova, A., Smith, P.J., Beven, K.J., Blazkova, S.D., Hlavacek, J. (2012): A method of computing uncertain nitrogen and phosphorus loads in a small stream from an agricultural catchment using continuous monitoring data, *Journal of Hydrology*, Vol. 458-459, pp. 1-8.
- Kronvang, B., Jeppesen, E., Conley, D.J., Søndergaard, M., Larsen, S.E., Ovesen, N.B., Carstensen, J. (2005): Nutrient pressures and ecological responses to nutrient loading reductions in Danish streams, lakes and coastal waters, *Journal of Hydrology*, Vol. 304, No. 1, pp. 274-288.
- Luo, P., He, B., Takara, K., Razafindrabe, B.H.N., Nover, D., Yamashiki, Y. (2011): Spatiotemporal trend analysis of recent river water quality conditions in Japan, *Journal of Environmental Monitoring*, Vol. 13, No. 10, pp. 2819-2829.
- Morvan, X., Saby, N., Arrouays, D., Le Bas, C., Jones, R., Verheijen, F., Bellamy, P.H., Stephens, M., Kibblewhite, M.G. (2008): Soil monitoring in Europe: a review of existing systems and requirements for harmonisation, *Science of the Total Environment*, Vol. 391, No.1, pp. 1-12.
- Rosen, M.R., Lapham, W.W. (2008): Introduction to the US Geological Survey National Water-Quality Assessment (NAWQA) of ground-water quality trends and comparison to other national programs, *Journal of Environmental Quality*, Vol. 37, No. 5_Supplement, pp. 190.
- Runkel, R.L., Crawford, C.G., Cohn, T.A. (2004): Load Estimator (LOADEST): A FORTRAN program for estimating constituent loads in streams and rivers, US Department of the Interior, US Geological Survey.
- Sakamoto, Y., Ishiguro, M., Kitagawa, G. (1986): *Akaike information criterion statistics*, Dordrecht, The Netherlands: D. Reidel.
- Shrestha, S., Kazama, F., Newham, L. (2008): A framework for estimating pollutant export coefficients from long-term in-stream water quality monitoring data, *Environmental Modelling and Software*, Vol. 23, No. 23, pp. 182-194.
- Shumway, R.H., Azari, R.S., Kayhanian, M. (2002): Statistical approaches to estimating mean water quality concentrations with detection limits, *Environmental Science and Technology*, Vol. 36, No. 15, pp. 3345-3353.
- Sprague, L.A., Lorenz, D.L. (2009): Regional Nutrient Trends in Streams and Rivers of the United States, 1993-2003, *Environmental Science and Technology*, Vol. 43, No. 10, pp. 3430-3435.
- Terrio, P.J. (2007): Concentrations, Fluxes, and Yields of Nitrogen, Phosphorus, and Suspended Sediment in the Illinois River Basin, 1996-2000., U.S. Geological Survey Scientific Investigations Report 2006-5078, 2007.
- USUTANI, T., NAKATSUGAWA, M. (2006): Quantitative Analysis of Hydrologic Cycle in Cold Snowy Basin, *Proceedings on the 18th IAHR International Symposium on Ice*, pp. 45-52.
- Webb, B.W., Phillips, J.M., Walling, D.E., Littlewood, I.G., Watts, C.D., Leeks, G. (1997): Load estimation methodologies for British rivers and their relevance to the LOIS RACS (R) programme, *Science of the Total Environment*, Vol. 194, No. 4b, pp. 379-389.

(Received June 11, 2013)