

Advanced Atomic Energy Research Section

K. Nagasaki, Professor (concurrent)

J. Yagi, Associate Professor

K. Mukai, Assistant Professor

1. Introduction

Main objective of our research division is to realize advanced energy systems for the sustainable development under global environmental constraints. We have shown a Zero-emission energy scenario based on fusion energy with biomass-based recycling system where biomass waste is converted into liquid fuel or hydrogen. And further we now propose an innovative Negative emission scenario to isolate CO₂ in the atmosphere by a carbonization process. Our research section focuses on development of hydrogen isotopes fuel circulation system, breeding blankets, fusion material R&D, feasibility study for fusion-biomass hybrid power system, conversion of biomass waste, and fusion neutron generation/measurement. The following are main research achievements in the fiscal year of 2023.

- Accomplishment of the highest efficiency for fusion fuel extraction from lead lithium eutectic alloy using the droplet system in the fusion study field.
- Electrochemical purification of nitrogen in liquid lithium using chloride molten salt.
- Elucidation of corrosion behavior on reduced activation steel F82H.
- Development of the water-cooling system for the cathode in the glow discharge type of fusion neutron source.

2. Fusion fuel (hydrogen isotope) recovery system development from liquid lead lithium droplets

Lead lithium eutectic alloy (Pb-17at%Li, Pb-Li) is a promising liquid material for the efficient fuel (hydrogen isotope) breeding on a fusion reactor. Effective recovery of the bred fuel is a key issue of liquid blanket fusion reactor.

We developed the vacuum sieve tray method, fusion fuel recovery from liquid Pb-Li droplets falling in vacuum. This fiscal year, on a collaboration work with National Institute for Fusion Science (NIFS), the continuous fuel recovery campaign was performed. We obtained fuel extraction efficiencies between 0.6 and 0.7 (Fig. 1). The long blue line shows proof-of-principle results performed in our division in 2013 [1]. Red circles show the results performed at NIFS this year. The two results are almost identical, showing the consistency of this method. This is the highest efficiency record in the fusion field.

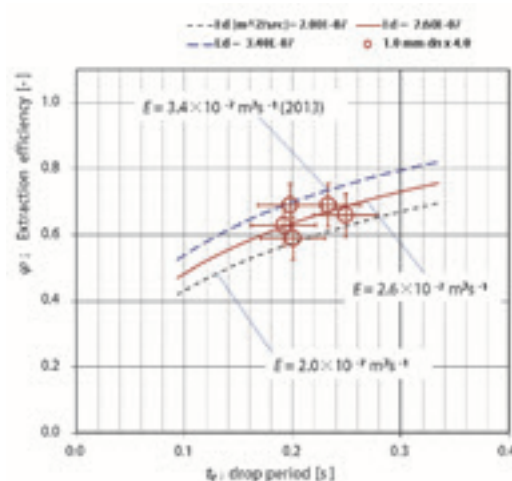


Fig.1 Obtained extraction efficiencies as a function of the droplet falling period. Blue long dash line shows a proof-of-principle result obtained in 2013 [1]. Red circles are results in 2023. Both are almost identical, showing the consistency of this recovery method.

3. Electrochemical purification of nitrogen impurities in liquid lithium using chloride molten salts

Fusion-relevant neutron sources, such as Advanced Fusion Neutron Source (A-FNS), are necessary for neutron irradiation experiments for the fusion material development. Liquid lithium is the flowing target of A-FNS, and easily absorbs nitrogen impurities which may cause corrosion of the structure material. Therefore, nitrogen extraction technology is essential for the A-FNS development.

We adapted an electrochemical method using chloride molten salt to extract nitrogen. In this ex-

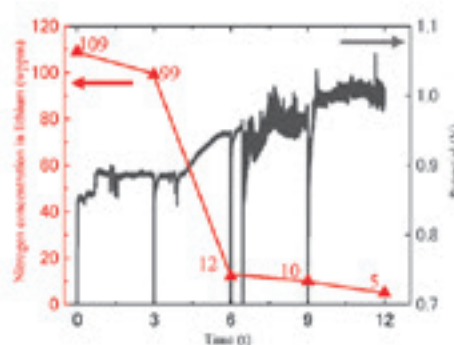


Fig.2 Temporal change of N concentration in liquid Li and the required potential for 2mA current.

periment, an electrochemical cell filled with chloride molten salt (LiCl 58.5 mol% – KCl 41.5 mol%) was prepared, and Li supported by a stainless-steel tube was placed in the chloride molten salt as the counter electrode. The working electrode was coil-shaped nickel wire. The temporal change of nitrogen concentration in liquid lithium was monitored at a constant current of 2mA (Fig. 2). This purification system sufficiently extracted nitrogen impurities.

4. Corrosion of reduced activation steel F82H steel by solid breeder material (LTZO) pebble

JA-DEMO plans to adapt lithium zirconate titanate ($\text{Li}_{2-x}\text{TiO}_{3+x} + \text{Li}_2\text{ZrO}_3$; LTZO) pebbles as the solid blanket breeder material, and reduced activation ferritic/martensitic (RAFM) steel F82H as the blanket structure material. The corrosion characteristics of F82H by LTZO pebbles are crucial because corrosion on F82H may degrade the strength of the structure. We experimentally investigated the formation of the corrosion layer on F82H to find the activation energy, which is required to predict corrosion behavior.

The corrosion on F82H by the LTZO pebbles was induced at 693, 833, and 993 K under sweep gas ($\text{Ar} + 0.1\% \text{H}_2$) flow. The temperature dependence of the diffusion coefficient is shown in Fig.3. ① is plotted based on the corrosion layer formed up to 380 hours, while ② is based on the corrosion layer formed up to 190 hours. The activation energies in the cases of ① and ② are calculated to be 1.67 eV and 0.94 eV, respectively. The red line in Fig.3 is the result of a similar study that investigated corrosion between $\text{Li}_2\text{TiO}_3 + \text{excess Li}_2\text{O}$ and EUROFER (another type of RAFM steel) [2]. The difference between ① and ② will be due to the “breakaway behavior” which is also reported by the work [2]. The activation energies in the present study are higher than that of the prior study on EUROFER. This may be due to the difference in the contact area between the solid breeder specimen and the structural material, and the supply rate of the Li_2O vapor. Therefore, it is expected that

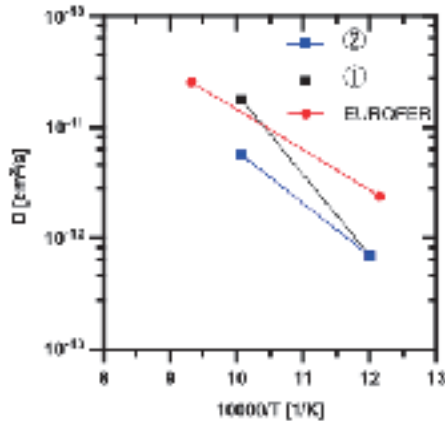


Fig.3 Temperature dependence on the diffusion coefficient of the corrosion layer on F82H or EUROFER.

the mechanism of corrosion and diffusion of Li and O that contribute to corrosion is not significantly different among the different types of solid breeder materials and structural materials.

5. Upgrading of the glow discharge type fusion neutron source by cathode cooling

The fusion neutron source of glow discharge type emits neutrons by inducing nuclear fusion reactions between deuterium and/or tritium. Fusion reactions in this device mainly occur on electrodes, especially on a cathode. This neutron source is expected to be used not only for fusion research but also for industrial applications and medical applications.

The device generates ions by applying an electric input (several tens of kilovolts and several tens of milliamperes) to induce a glow discharge. Although a neutron production rate (NPR) has a positive correlation with a current, an NPR tends to stagnate at a high current operational regime. This stagnation of NPR is caused by the decrease of deuterium concentration on a cathode due to deuterium desorption.

We constructed the water-cooling feedthrough system to solve the issue caused by deuterium desorption. The present study aims to evaluate the cathode cooling effect on NPR. The diamond-like carbon (DLC)-coated cathode was employed in the neutron production experiment. Fig.4 shows that the cathode cooling prevents the stagnation of NPR in the high current regime ($> 30 \text{ mA}$) and enhance the NPR. This effect means the cooling system surpasses deuterium concentration on the cathode. At 50 kV and 60 mA (the maximum electric input of this experiment), the NPR in the case using the water-cooling system achieved more than twice as high as the NPR in the case without the water-cooling system. The water-cooling system is expected to expand applications of fusion neutron sources.

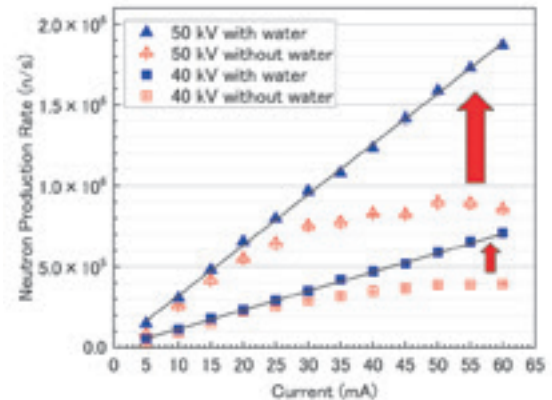


Fig.4 Comparison of NPRs between the cases with/without the water-cooling system.

References

- [1] F. Okino et al., *Fusion Sci. Tech.* 64 (2013) pp. 549
- [2] K. Mukai et al., *Nucl. Mater. Energ.*, 15 (2018) pp.190

Collaboration Works

八木重郎, University of California San Diego (アメリカ), SiC/SiC 複合材料で製作した配管試験体を流動液体金属 (PbLi) に曝露し、その腐食特性を調べる

八木重郎, 核融合科学研究所 一般共同研究, 横断的研究のための COE 共同研究プラットフォーム・Oroshhi-2 の利用検討会

興野文人, 核融合科学研究所 一般共同研究, 液体リチウム鉛方式ブランケットループからのトリチウム回収に関する研究

Financial Support

1. Grant-in-Aid for Scientific Research

八木重郎, 基盤研究(B), 機能性被覆の劣化診断手法と修復技術の開発 (分担金)

八木重郎, 基盤研究(B), 高強度中性子環境における電気絶縁被覆機能材料の反跳原子による特性変化 (分担金)

向井啓祐, 基盤研究(B), 事故耐性ハイブリッドセラミックスの創成

向井啓祐, 基盤研究(B), リチウム6同位体濃縮の為のハイブリッドカスケードシステムの開発 (分担金)

坂部俊郎, 特別研究員奨励費, 放電型核融合中性子源の実用化に向けた自己制御システムの構築に関する研究

2. Others

八木重郎, 量子科学技術研究開発機構, 液体リチウム流動ループ中での窒素トラップの健全性評価

八木重郎, 京都フュージョニアリング(株), 核融合炉内機器及び付属システムの開発研究

向井啓祐, 量子科学技術研究開発機構, 固体増殖材による低放射化フェライト鋼の腐食と機械的強度への影響評価

Publications

K. Mukai, One-step fabrication of Li_2TiO_3 ceramic pebbles using pulsed YAG laser, Journal of the American Ceramic Society, 106, 10, 5581-6377, 2023

K. Mukai, J-H. Kim, M. Nakamichi, Measurement of thermal expansion anisotropy in Be_{12}Ti and Be_{12}V , Nuclear Materials and Energy, 36, 101473, 2023

Y. Ogino, S. Kenjo, T. Sakabe, K. Mukai, M. Bakr, J. Yagi, S. Konishi, Measurements of Thermal and Epithermal Neutron Spatial Distribution Using Activation Foils Inside a Fusion Blanket Mock-Up, IEEE Transactions on Plasma Science, 1-7, 2023

R. Ito, F. Nomoto, Y. Ogino, K. Mukai, J. Yagi, Lithium Isotope Enrichment Effects in Liquid Metal/Chloride Molten Salt System, Fusion Science and Technology, 2229673, 2023

T. Sakabe, Y. Ogino, K. Mukai, J. Yagi, M. Bakr, Influence of the Hydrogen Isotope Affinity of the Cathode Coating Material on the Neutron Production Rate in the Glow Discharge-Type Fusion Neutron Source, Fusion Science and Technology, 2227821, 2023

T. Matsuo, S. Kenjo, K. Mukai, J. Yagi, S. Konishi, Gas composition change during operation of a compact discharge fusion neutron source with a closed deuterium supply system, Fusion Engineering and Design, 195, 113979, 2023

Y. Ogino, M. Kobayashi, K. Mukai, J. Yagi, S. Konishi, K. Ogawa and M. Isobe, Evaluation of Gamma-Ray Dose Distribution in the Toroidal Direction of LHD Vacuum Vessel from Radionuclides Generated in Deuterium Plasma Experiments, International Journal of Energy Research, 2024, 1550582, 2024

Y. Urano, K.I. Fushimi, K. Hata, Y. Kawai, S. Konishi, K. Kotera, S. Kurosawa, K. Mukrai, Y. Ogino, R. Orito and T. Sakabe, Quenching factor measurement of low-energy Na recoils in ultra-pure NaI(Tl) crystal, Proceedings of Science, 441, 2024

F. Okino, Y. Hamaji, T. Tanaka & J. Yagi, Axial Concentration of Dissolved Deuterium by Dispersion in a LiPb Experimental Loop, Fusion Science and Technology, 2024

R. Ito, S. Aratani, K. Mukai, J. Yagi, Gas analysis in electrochemical extraction of hydrogen from liquid lithium, Fusion Engineering and Design, 200, 114192, 2024

S. Kenjo, M. Oyaidzu, K. Obata, K. Ochiai, S. Sato, Assessment on liquid Li fire risk under humid air condition and with heat insulator, Nuclear Materials and Energy, 38, 101569, 2024

Presentations

H. Tamiya, J. Yagi, K. Mukai, S. Takayama, Effect of Fe_3O_4 grain size on Microwave Pyrolysis of Cellulose, 57th Annual Microwave Power Symposium (IMPI 57), The Curtis Hotel, Denver, Colorado, USA, 2023.6.27-29

八木重郎, 液体金属とその利用-核融合・原子力分野での高伝熱性流体-, 第46回京都大学宇治キャンパス産学交流会, 京都大学宇治キャンパス, 2023.7.5

T. Sakabe, E. Edwards, A. Lanzrath, J. Ball, S. Mackie, S. Segantin, R.A. Tinguely, K. Woller, Feasibility Study of Real-time Neutron Measurement using a Diamond detector for the LIBRA experiment, The 30th IEEE Symposium on Fusion Engineering (SOFE2023), The University of Oxford, England, 2023.7.9-14

T. Wallace-Smith, M. Bakr, T. Sakabe, K. Mukai, T. Scott, T. Firestone, Fusion Rate Enhancement through Deuterium Enrichment of Plasma-Facing Component Surfaces, The 30th IEEE Symposium on Fusion Engineering (SOFE2023), The University of Oxford, England, 2023.7.9-14

Y. Ogino, K. Mukai, F. Araki, S. Kusaka, T. Matsuo, J. Yagi, S. Tamaki, I. Murata, Evaluations of the neutron flux and the tritium production inside a fusion breeding blanket mock-up, The 30th IEEE Symposium on Fusion Engineering (SOFE2023), The University of Oxford, England, 2023.7.9-14

S. Takayama, K. Mukai, J. Yagi, Development of a method for compoising Li_2TiO_3 and nanocarbon by microwave irradiation, 第14回エネルギー理工学研究所国際シンポジウム, 京都大学宇治おうばくプラザ, 2023.8.30-9.1

K. Itagaki, R. Kasada, K. Yabuuchi, K. Mukai, Development and evaluation of Fe_2M type bulk Laves compounds, 第14回エネルギー理工学研究所国際シンポジウム, 京都大学宇治おうばくプラザ, 2023.8.30-9.1

K. Sasaki, Y. Shindo, K. Mukai, I. Takahashi, R. Kasada, Study of the surface modification layer of lithium ion electrolyte for electrodialysis, 第14回エネルギー理工学研究所国際シンポジウム, 京都大学宇治おうばくプラザ, 2023.8.30-9.1

J-H. Kim, T. Hwang, Y. Sugimoto, K. Mukai, K. Yabuuchi, R. Kasada, M. Nakamichi, Hydrogen absorption and desorption properties of beryllium intermetallic compounds, 第14回エネルギー理工学研究所国際シンポジウム, 京都大学宇治おうばくプラザ, 2023.8.30-9.1

I. Takahashi, E. Kaji, R. Yoneyama, T. Watanabe, K. Sasaki, K. Mukai, Analysis and Design of Electrode/Electrolyte Interface for All Solid State Battery, 第14回エネルギー理工学研究所国際シンポジウム, 京都大学宇治おうばくプラザ, 2023.8.30-9.1

興野文人, 浜地志憲, 田中照也, 八木重郎, リチウム鉛液滴からのトリチウム連続回収能率 その2 高回収率の検討, 日本原子力学会 2023 年秋の年会, 名古屋大学, 2023.9.6-8

伊藤諒, 荒谷舜, 北川柚葉, 向井啓祐, 八木重郎, 塩化物熔融塩を用いた液体リチウム中窒素素の電気化学的抽出における発生ガスの分析, 日本原子力学会 2023 年秋の年会, 名古屋大学, 2023.9.6-8

荒谷舜, 伊藤諒, 北川柚葉, 向井啓祐, 八木重郎, 塩化物熔融塩を用いた液体金属リチウム中窒素不純物の電気化学的抽出における発生ガスの分析, 日本原子力学会 2023 年秋の年会, 名古屋大学, 2023.9.6-8

向井啓祐, ベリリウム金属間化合物の熱膨張異方性の評価, 日本原子力学会 2023 年秋の年会, 名古屋大学, 2023.9.6-8

J. Yagi, Y. Matsunaga, M. Tabuchi, S. Kajimura, K. Mukai, S. Konishi, Alkali metal vapor diffusion pump for fusion reactor evacuation, 15th International Symposium on Fusion Nuclear Technology (ISFNT-15), The Auditorio Alfredo Kraus, Las Palmas de Gran Canaria, Spain, 2023.9.10-15

F. Okino, Y. Hamaji, J. Yagi, T. Tanaka, Continuous tritium extraction from falling LiPb droplets in a vacuum, 15th International Symposium on Fusion Nuclear Technology (ISFNT-15), The Auditorio Alfredo Kraus, Las Palmas de Gran Canaria, Spain, 2023.9.10-15

S. Aratani, R. Ito, K. Mukai, J. Yagi, Electrochemical extraction of nitrogen impurities in liquid lithium using chloride molten salt, 15th International Symposium on Fusion Nuclear Technology (ISFNT-15), The Auditorio Alfredo Kraus, Las Palmas de Gran Canaria, Spain, 2023.9.10-15

R. Ito, S. Aratani, K. Mukai, J. Yagi, Equilibrium distribution of lithium isotope between liquid metal and chloride molten salt containing CsCl , 15th International Symposium on Fusion Nuclear Technology (ISFNT-15), The Auditorio Alfredo Kraus, Las Palmas de Gran Canaria, Spain, 2023.9.10-15

田宮裕之, 向井啓祐, 高山定次, 八木重郎, セルロースのマイクロ波熱分解における水蒸気添加と生成ガスへの影響, 第 17 回日本電磁波エネルギー応用学会シンポジウム, 2023.10.25-27

八木重郎, 荒谷舜, 向井啓祐, 動環境リチウム中における窒素回収 Fe-Ti 合金粒の挙動, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

荒谷舜, 伊藤諒, 北川柚葉, 向井啓祐, 八木重郎, 液体金属リチウムからの窒素不純物の電気化学的除去, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

伊藤諒, 荒谷舜, 北川柚葉, 向井啓祐, 八木重郎, 液体金属と塩化物溶融塩を用いた電気化学的酸化還元によるリチウム同位体効果, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

片岡浩輔, 向井啓祐, 八木重郎, 固体増殖材 LTZO ペブルによる F82H 鋼表面の腐食挙動, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

藤井大輔, 坂部俊郎, 向井啓祐, 八木重郎, 酸化チタン表面の窒化による窒化/酸化チタン窒化による二重被覆の作製, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

北川柚葉, 坂部俊郎, 伊藤諒, 向井啓祐, 八木重郎, 先進ブランケット液体増殖材 Li-Pb-Na の水素溶解度, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

美濃部治美, 伊藤諒, 向井啓祐, 八木重郎, 超臨界二酸化炭素による F82H 鋼の腐食における酸素不純物濃度の影響, 第 40 回プラズマ・核融合学会 年会, アイーナ・いわて県民情報交流センター, 2023.11.27-30

伊藤諒, 荒谷舜, 北川柚葉, 八木重郎, 核融合炉ブランケット液体増殖材の高温電解合成, 電気化学会北陸支部秋季大会, オンライン, 2023.12.14

伊藤諒, 荒谷舜, 北川柚葉, 向井啓祐, 八木重郎, 液体 $\text{Pb}/\text{Li}_{17}\text{Pb}_{83}$ 電極におけるリチウム脱挿入挙動, 電気化学会第 91 回大会, 名古屋大学東山キャンパス, 2024.3.14-16

興野文人, 浜地志憲, 田中照也, 八木重郎, リチウム鉛液滴からのトリチウム回収 - 管内部分流によるトリチウム回収率向上, 日本原子力学会 2024 年春の年会, 近畿大学 東大阪キャンパス, 2024.3.26-28

坂部俊郎, 石井嵩也, 向井啓祐, 八木重郎, 放電型核融合中性子源における陰極水冷式フィードスルーの中性子発生率への効果, 日本原子力学会 2024 年春の年会, 近畿大学 東大阪キャンパス, 2024.3.26-28