

Chemical Reaction Complex Processes Research Section

T. Nohira, Professor
 T. Kodaki, Associate Professor
 T. Ymamoto, Assistant Professor

1. Introduction

In this research section, we study on electrochemistry, materials science, genetic engineering and protein engineering. We also apply them to the developments of efficient metal plating processes, new secondary batteries and efficient bioethanol production processes.

In this fiscal year, we have researched an electrodeposition processes of titanium, a potassium secondary battery using ionic liquids, and an efficient bioethanol production process using ionic liquids.

2. Development of New Plating Processes of Titanium Using Molten Salt Electrolytes

Titanium metal has excellent properties such as high specific strength, high corrosion resistance, and biocompatibility. In addition to these properties, the amount of titanium present in the earth's crust is more than 40 times greater than the commonly used copper and nickel. However, titanium is not widely used due to two problems: high cost and poor workability. Therefore, there is a need for new smelting and processing methods. One way to solve these problems is to plate titanium metal on an inexpensive substrate. Electrodeposition of titanium is a promising plating method in terms of cost and flexibility of substrate shape. Therefore, electrodeposition of titanium metal using molten salt at high temperature has been studied for a long time [1-3].

We have already reported the electrodeposition of compact, smooth and well adherent titanium films using molten salts of KF–KCl and LiF–LiCl containing Ti(III) ions at 923 K [4,5]. However, as the titanium film thickness increases, the crystal grains become larger and the surface becomes rougher. It is expected that the titanium film has a smoother surface at lower electrodeposition temperature. In the present study, we investigated the effect of temperature on the morphology and smoothness of titanium films electrodeposited in LiF–LiCl eutectic melt at 823–973 K.

Galvanostatic electrolysis was carried out at 823, 873, 923 and 973 K. The cathode current density was 100 mA cm^{-2} and the electrolysis time was 10 min. Figure 1 shows the optical and surface SEM images of the samples. All the samples have metallic luster; the 823K sample has the highest brightness and metallic luster. SEM observation of the surface shows that the grain size









	Temperature / K			
	823	873	923	973
Optical				
Surface SEM				
Sa / μm	2.05 ± 0.22	4.58 ± 0.31	5.00 ± 0.65	5.71 ± 0.92

Fig. 1. Optical and surface SEM images of the samples obtained by galvanostatic electrolysis of Ni plates in molten LiF–LiCl after the addition of Li_2TiF_6 (2.0 mol%) and Ti sponge (1.3 mol%) at 823, 873, 923, and 973 K. Cathodic current density and time: 100 mA cm^{-2} and 10 min. Arithmetic mean heights (Sa) are also listed.

increases with increasing temperature. This trend can be reasonably explained by previous studies on temperature-dependent grain growth of Ti [6]; the value of Arithmetic mean height (Sa) also increases with increasing temperature. These results conclude that at lower temperatures, smoother surface Ti films can be electrodeposited by suppressing the grain growth of Ti.

3. Development of Potassium Secondary Batteries Using Ionic Liquid Electrolytes

Widespread installation of large-scaled energy storage devices is essentially required to establish the sustainable society based on renewable energy resources such as solar and wind power. Lithium-ion batteries (LIBs), which has been applied for portable electronic devices, could be candidates of large-scaled energy storage devices. However, scarce lithium resources and flammable organic solvents are used as main components of LIBs, which might be a major barrier to the further distribution. Our group has focused on potassium secondary batteries using ionic liquid electrolytes because potassium resources are abundant in the Earth's crust and ionic liquids possess high safety such as negligible volatility and non-

flammability [7].

In this fiscal year, we developed several ionic liquid electrolytes for potassium secondary batteries. K[FSA]–[C₂C₁im][FSA] ionic liquid (FSA = bis(fluorosulfonyl)amide, C₂C₁im = 1-ethyl-3-methylimidazolium; K[FSA] molar fraction: $x(\text{K[FSA]}) = 0.20$) exhibited an ionic conductivity of 10.1 mS cm^{−1} at 298 K, which was twice as high as that of K[FSA]–[C₃C₁pyrr][FSA] counterpart (C₃C₁pyrr = *N*-methyl-*N*-propylpyrrolidinium) [7]. We also explored new ionic liquids with an asymmetric anion, FTA[−] (FTA = (fluorosulfonyl)(trifluoromethylsulfonyl)amide). K[FTA]–[C₄C₁pyrr][FTA] ionic liquid (C₄C₁pyrr = *N*-butyl-*N*-methylpyrrolidinium; $x(\text{K[FTA]}) = 0.20$) showed a moderate ionic conductivity of 2.2 mS cm^{−1} at 298 K. Lastly, charge–discharge behaviors of graphite negative electrodes were investigated using the K[FTA]–[C₄C₁pyrr][FTA] ionic liquid at 313 K. As shown in Fig. 2, the graphite electrode exhibited reversible capacities of ca. 230 mAh (g-C)^{−1}, corresponding to 80–85% of the theoretical capacity (279 mAh (g-C)^{−1}).

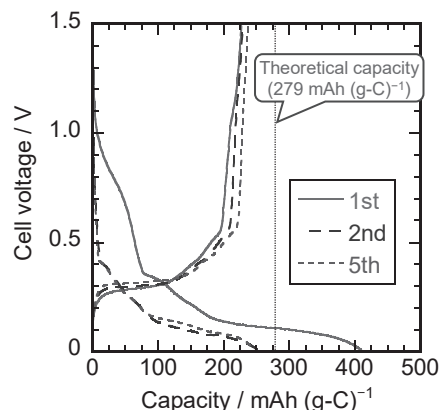


Fig. 2. Charge–discharge curves of a K/graphite cell using K[FTA]–[C₄C₁pyrr][FTA] electrolyte at 313 K. Current density: 27.9 mA (g-C)^{−1}.

4. Efficient Bioethanol Production from Lignocellulosic Biomass Using Ionic Liquid

Recently, pretreatment with ionic liquid was found to be improved yields of sugars from lignocellulosic biomass. On the other hand, ionic liquid was deleterious for growth of microorganisms including yeast.

In this fiscal year, several mutant strains of a recombinant xylose fermenting yeast with increased tolerance to ionic liquid were isolated in order to improve fermentation efficiency in the presence of ionic liquid. Ionic liquid tolerant yeast strains were selected by culturing in the presence of 150 mM of a ionic liquid, 1-butyl-3-methylimidazolium chloride ([Bmim]Cl) after UV irradiation mutation. As shown in Fig. 3, a representative mutant strain was grown even in the presence of 300 mM [Bmim]Cl. Furthermore, this strain metabolized both glucose and xylose, and fermented ethanol efficiently in the presence of 300 mM [Bmim]Cl (Fig. 4).

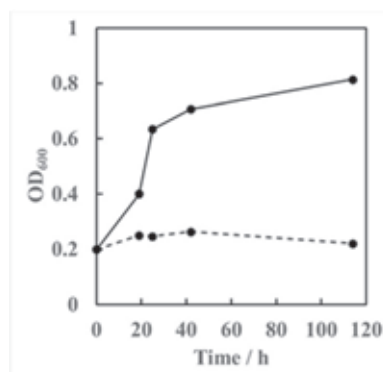


Fig. 3. Growth in the presence of 300 mM [Bmim]Cl. ionic liquid tolerant strain: solid line, wild type strain: dashed line.

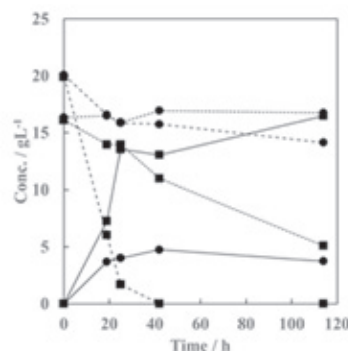


Fig. 4. Glucose and xylose consumption and ethanol fermentation in the presence of 300 mM [Bmim]Cl. ionic liquid tolerant strain: square, wild type strain: circle, ethanol: solid line, glucose: dashed line, xylose: dotted line.

Acknowledgement

These researches were partly supported by grants to T. K. from JST e-ASIA JRP and to T. Y. from JSPS KAKENHI (18K14320) and Izumi Science and Technology Foundation.

References

- [1] J.O'M Bockris, G.J. Hills, I.A. Menzies, L. Young, *Nature*, **178**, 654 (1956).
- [2] D. Wei, M. Okido, and T. Oki, *J. Appl. Electrochem.*, **24**, 923 (1994).
- [3] A. Robin and R. B. Ribeiro, *J. Appl. Electrochem.*, **30**, 239 (2000).
- [4] Y. Norikawa, K. Yasuda, and T. Nohira, *J. Electrochem. Soc.*, **166**, D755 (2019).
- [5] Y. Norikawa, K. Yasuda, and T. Nohira, *J. Electrochem. Soc.*, **167**, 082502 (2020).
- [6] K. Okazaki and H. Conrad, *Metall. Trans.*, **3**, 2411 (1972).
- [7] T. Yamamoto, K. Matsumoto, R. Hagiwara, T. Nohira, *J. Phys. Chem. C*, **121**, 18450 (2017).

Collaboration Works

大垣英明, 森井孝, 片平正人, 野平俊之, モンゴル国立大学, インドネシア大学, フィリピン大学ディリマン校, ベトナム国家大学ハノイ校, ラオス国立大学, 王立ブノンペン大学, アジア新興国産天然資源を由来とする機能性物質創生のための高度分析研究拠点の形成

Financial Support

1. Grant-in-Aid for Scientific Research

野平俊之, 基盤研究(A), シリカ直接電解還元と液体合金カソードを用いた高生産性太陽電池用シリコン製造法

山本貴之, 若手研究, カリウムイオンを電荷担体とする新規イオン液体電解質の開発

法川勇太郎, 特別研究員奨励費, 金属チタンのより広範な利用を目的とした新規電解めっき法に関する研究

華航, 特別研究員奨励費, 熔融フッ化物電解と合金隔膜を用いた希土類金属の高精度・高速分離プロセスの構築

2. Others

野平俊之, 新エネルギー・産業技術総合開発機構, 高効率な資源循環システムを構築するためのリサイクル技術の研究開発事業

野平俊之, (独) 国際協力機構, JICA 研修員受入

野平俊之, 住友電気工業 (株), 200°C以下の融点を有する熔融塩を用いた高付加価値材料のめっき技術に関する共同研究

野平俊之, 住友電気工業 (株), 熔融塩を用いた高付加価値材料の電解技術に関する共同研究

小瀧努, 科学技術振興機構, サトウキビ収穫廃棄物の統合バイオリファインリー

Publications

H. Onuma, K. Kubota, S. Muratsubaki, T. Hosaka, R. Tatara, T. Yamamoto, K. Matsumoto, T. Nohira, R. Hagiwara, H. Oji, S. Yasuno, S. Komaba, Application of Ionic Liquid as K-Ion Electrolyte of Graphite//K₂Mn[Fe(CN)₆] Cell, ACS Energy Letters, 5,

2849-2857, 2020

X. Yang, T. Nohira, A New Concept for Producing White Phosphorus: Electrolysis of Dissolved Phosphate in Molten Chloride, ACS Sustainable Chemistry & Engineering, 8, 36, 13784-13792, 2020

T. Yamamoto, S. Nishijima, T. Nohira, Comparative study of M[N(SO₂F)(SO₂CF₃)]-[N-butyl-N-methylpyrrolidinium][N(SO₂F)(SO₂CF₃)] (M = Li, Na, K, Rb, Cs) ionic liquid electrolytes, Journal of Physical Chemistry B, 124, 8380-8387, 2020

T. Nohira, Novel Electrochemical Reactions in Molten Salts and Ionic Liquids and Their Applications, Electrochemistry, 88, 6, 477-488, 2020

Y. Katasho, K. Yasuda, T. Oishi, T. Nohira, Electrochemical reduction behavior of vitrified nuclear waste simulant in molten CaCl₂, Journal of Nuclear Materials, 543, 152578, 2020

K. Yasuda, T. Enomoto, Y. Watanabe, T. Oishi, T. Nohira, Electrochemical Dy-Alloying Behaviors of Ni-Based Alloys in Molten LiF-CaF₂-DyF₃: Effects of Constituent Elements, Materials Transactions, 61, 12, 2329-2335, 2020

H. Hua, K. Yasuda, H. Konishi, T. Nohira, Electrochemical Formation of Dy-Ni Alloys in Molten CaCl₂-DyCl₃, Journal of The Electrochemical Society, 167, 14, 142504, 2020

T. Oishi, M. Yaguchi, Y. Katasho, H. Konishi, T. Nohira, Selective Permeation of Dysprosium Through an Alloy Diaphragm in Molten Chloride Systems, Journal of The Electrochemical Society, 167, 16, 163505, 2020

T. Yamamoto, R. Matsubara, T. Nohira, Highly Conductive Ionic Liquid Electrolytes for Potassium-Ion Batteries, Journal of Chemical and Engineering Data, 66, 2, 1081-1088, 2021

Y. Ma, K. Yasuda, A. Ido, T. Shimao, M. Zhong, R. Hagiwara, T. Nohira, Silicon Refining by Solidification from Liquid Si-Zn Alloy and Floating Zone Method, Materials Transactions, 62, 3, 403-411, 2021

H. Hua, K. Yasuda, H. Konishi, T. Nohira, Electrochemical Formation of Nd-Ni Alloys in Molten CaCl₂-NdCl₃, Journal of The Electrochemical Society, 168, 3, 032506, 2021

Presentations

T. Nohira, Electrodeposition of Crystalline Silicon Films in Molten Salts for Photovoltaic Applications, The 11th International Symposium of Advanced Energy Science, Online, 2020.9.15-16

H. Usui, Y. Domi, N. Takada, T. Yamamoto, T. Nohira, K. Matsumoto, R. Hagiwara, H. Sakaguchi, The Reaction Mechanism of InSb Anode for Na-Ion Batteries, The 11th International Symposium of Advanced Energy Science, Online, 2020.9.15-16

K. Kuritani, Y. Domi, H. Usui, T. Yamamoto, T. Nohira, H. Sakaguchi, Electrochemical Potassiation/Depotassiation Properties of Various Antimony-Based Electrodes, The 11th International Symposium of Advanced Energy Science, Online, 2020.9.15-16

K. Harada, Y. Norikawa, H. Matsushima, T. Nohira, Study of Hydrogen Isotope Separation Technology by Molten Salt, The 11th International Symposium of Advanced Energy Science, Online, 2020.9.15-16

野平俊之, 法川勇太郎, 飯塚政利, 柔軟性の高い MA 回収・核変換技術の開発(11)電解による熔融塩からのヨウ素分離回収, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

飯塚政利, 太田宏一, 野平俊之, 大釜和也, 小藤博英, 柔軟性の高い MA 回収・核変換技術の開発(13)MA 回収・核変換を含むサイクルシナリオ検討とマルチサイクル評価, 日本原子力学会 2020 年秋の大会, オンライン開催, 2020.9.16-18

A. Yadav, S. Nishijima, T. Yamamoto, T. Nohira, Comparative Studies on Graphite and Hard Carbon Negative Electrodes for Alkali Metal-Ion Batteries Using FSA-Based Ionic Liquids, PRiME 2020, Online, 2020.10.4-9

T. Yamamoto, K. Matsumoto, R. Hagiwara, T. Nohira, Charge-Discharge Performance of Positive Electrodes for Fluoride-Shuttle Batteries Using Fluorohydrogenate Ionic Liquid Electrolytes, PRiME 2020, Online, 2020.10.4-9

T. Nishida, Y. Fukunaka, T. Homma, T. Nohira, Initial Stage of Li Electrodeposition in PC Electrolyte, PRiME 2020, Online, 2020.10.4-9

T. Oishi, M. Yaguchi, Y. Katasho, T. Nohira, Selective Permeation of Neodymium through an Alloy Diaphragm in Molten Chloride Systems, PRiME 2020, Online, 2020.10.4-9

H. Hua, K. Yasuda, H. Konishi, T. Nohira, Electrochemical Formation of RE-Ni Alloys (RE=Nd, Dy) in Molten $\text{CaCl}_2\text{-RECl}_3$, PRiME 2020, Online, 2020.10.4-9

S. Nishijima, A. Yadav, T. Yamamoto, T. Nohira, FTA-Based Ionic Liquids: Promising Electrolytes for Alkali Metal-Ion Secondary Batteries, PRiME 2020, Online, 2020.10.4-9

M. Unoki, Y. Norikawa, K. Yasuda, T. Nohira, Optimization of Electrolysis Conditions for Ti Film Electrodeposition from LiF-LiCl Eutectic Molten Salt, PRiME 2020, Online, 2020.10.4-9

S. Takahashi, Y. Norikawa, K. Yasuda, T. Nohira, Electrodeposition of Crystalline Silicon Films in Molten $\text{KF-KCl-K}_2\text{SiF}_6$ for Photovoltaic Applications, PRiME 2020, Online, 2020.10.4-9

T. Nohira, X. Meng, T. Ide, Y. Norikawa, K. Yasuda, Electrodeposition of Tungsten from Molten KF-KCl-WO_3 and CsF-CsCl-WO_3 , PRiME 2020, Online, 2020.10.4-9

Y. Norikawa, K. Yasuda, K. Numata, H. Sakaida, M. Ogawa, M. Majima, T. Nohira, Effect of Temperature on Electrodeposition of Ti in LiF-LiCl Eutectic Melt, PRiME 2020, Online, 2020.10.4-9

Y. Ma, T. Yamamoto, K. Yasuda, T. Nohira, Dissolution Behavior of SiO_2 and Electrochemical Reduction of Dissolved SiO_2 in Molten Chlorides, PRiME 2020, Online, 2020.10.4-9

鶴木亮, 法川勇太郎, 安田幸司, 沼田昂真, 境田英彰, 小川光靖, 真嶋正利, 野平俊之, フッ化物-塩化物混合熔融塩中でのチタン電析における酸化物イオンの影響, 第 93 回レアメタル研究会, Online, 2020.11.6

山本貴之, 松本一彦, 萩原理加, 野平俊之, フルオロハイドロジェネートイオン液体電解質を用いたフッ化物シャトル電池用高電位正極材料の開発, 第 61 回電池討論会, Online, 2020.11.18-20

西島士湧, 山本貴之, 野平俊之, $\text{M[FTA]-[C}_4\text{C}_1\text{pyrr][FTA]}$ ($\text{M} = \text{Li, Na, K, Rb, Cs}$)イオン液体電解質の特性評価および二次電池への応用, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

鶴木亮, 法川勇太郎, 沼田昂真, 境田英彰, 小川光靖, 真嶋正利, 野平俊之, 共晶 CsF-CsCl 熔融塩中でのチタン電析, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

華航, 安田幸司, 野平俊之, 熔融 CaCl_2 中における RE-Ni (RE = Nd or Dy)合金の熱力学データの測定, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

馬元嘉, 山本貴之, 安田幸司, 野平俊之, 熔融 $\text{NaCl-CaCl}_2\text{-CaO}$ 中における SiO_2 の溶解形態および電解還元, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

孟憲鐸, 法川勇太郎, 安田幸司, 野平俊之, 熔融 CsF-CsCl-WO_3 中で得られる電析 W 膜の平滑性および結晶構造に与える浴温の影響, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

高橋俊太, 法川勇太郎, 安田幸司, 野平俊之, 熔融 $\text{KF-KCl-K}_2\text{SiF}_6$ 中における結晶性 Si 電析および光電気化学測定による電析膜の評価, 第 52 回熔融塩化学討論会, Online, 2020.11.26-27

西島士湧, Alisha Yadav, 山本貴之, 野平俊之, FTA 系イオン液体の電解質特性評価およびアルカリ金属イオン二次電池への応用, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

鵜木亮, 法川勇太郎, 安田幸司, 沼田昂真, 境田英彰, 小川光靖, 真嶋正利, 野平俊之, 共晶 LiF-LiCl 熔融塩中での金属チタンめっきにおける電解条件の最適化, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

華航, 安田幸司, 小西宏和, 野平俊之, $\text{CaCl}_2\text{-RECl}_3$ 熔融塩中における RE-Ni(RE = Nd, Dy)合金の電解形成, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

茂木渉, 法川勇太郎, 野平俊之, フッ化カリウム-塩化カリウム熔融塩中における液体金属電極上での結晶性シリコン電析, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

孟憲鐸, 法川勇太郎, 安田幸司, 野平俊之, 熔融 CsF-CsCl 中における平滑タンゲステン電析, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

高橋俊太, 法川勇太郎, 安田幸司, 野平俊之, 熔融 $\text{KF-KCl-K}_2\text{SiF}_6$ を用いた結晶性ドーパ Si 電析およびその半導体特性評価, 2020 年度第 3 回関西電気化学研究会, Online, 2020.11.28

眞鍋光毅, 山本貴之, 野平俊之, 高ナトリウムイオン濃度を有する FSA 系イオン液体を用いたナトリウム二次電池, イオン液体ワークショップ 2020, Online, 2020.12.4

法川勇太郎, フッ化物-塩化物熔融中における金属チタン電析, 第 2 回非鉄製錬学 Web 討論会, Online,

2021.1.15

野平俊之, 熔融塩およびイオン液体中における新規な電気化学反応とその応用, 電気化学会第 88 回大会, Online, 2021.3.22-24

山本貴之, 松本一彦, 萩原理加, 野平俊之, フルオロハイドロジェネートイオン液体電解質中における銀正極の充放電挙動, 電気化学会第 88 回大会, Online, 2021.3.22-24

華航, 安田幸司, 野平俊之, 熔融 CaCl_2 中における電気化学的 Dy/Nd 分離に対する添加フッ素イオン濃度の影響, 電気化学会第 88 回大会, Online, 2021.3.22-24

孟憲鐸, 法川勇太郎, 野平俊之, 熔融 CsF-CsCl-WO_3 中における $\beta\text{-W}$ 電析, 電気化学会第 88 回大会, Online, 2021.3.22-24

眞鍋光毅, 山本貴之, 野平俊之, FSA 系イオン液体を用いた Na 二次電池の充放電挙動に与える電解質中の Na^+ イオン濃度の影響, 電気化学会第 88 回大会, Online, 2021.3.22-24

茂木渉, 法川勇太郎, 野平俊之, 熔融 $\text{KF-KCl-K}_2\text{SiF}_6$ 中における液体 Zn 電極上での結晶性 Si 電析, 電気化学会第 88 回大会, Online, 2021.3.22-24

金村祥平, 高橋優也, 大森孝, 野平俊之, 坂村義治, 松村達郎, 電気化学的手法を用いた高レベル放射性廃棄物からの長寿命核分裂生成物の分離回収技術, 電気化学会第 88 回大会, Online, 2021.3.22-24